


KR06W (1.0)

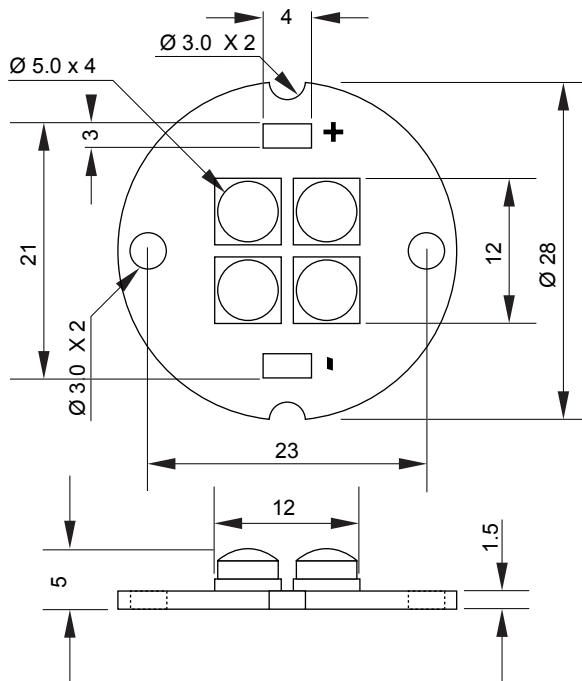

Absolute Maximum Rating at ($T_a=25^\circ\text{C}$)

| Parameter | Symbol | Maximum Rating | Unit |
|--|--------|--------------------|------|
| Power Dissipation | Pd | 4 | W |
| Forward Current | If | 500 | mA |
| Forward Voltage | Vr | 6.3 | V |
| Operating Temperature Range | Topr | - 40 °C to + 85 °C | |
| Storage Temperature Range | Tstg | - 40 °C to + 85 °C | |
| Solder Temperature 1/16 Inch Below Seating Plane for 3 seconds at 260 °C | | | |

* Condition for Ifp is pulse of 1/10 Duty Cycle, 0.1ms Pulse Width

Electrical/Optical Characteristics at $T_a=25^\circ\text{C}$

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------|-----------------|-----------|-----|-----|-----|------|
| Forward Voltage | Vf | If=20mA | | 6.3 | | V |
| Reverse Current | Ir | Vr=5V | | | 100 | uA |
| Dominant Wavelength | λ_d | If=20mA | | | | nm |
| Peak Wavelength | λ_p | If=20mA | | | | nm |
| Viewing Angle | $2\Theta_{1/2}$ | If=20mA | | 120 | | dfg |