


BUMP-SENSOR

SEN-BUMP01

BUMP-SENSOR

SEN-BUMP01

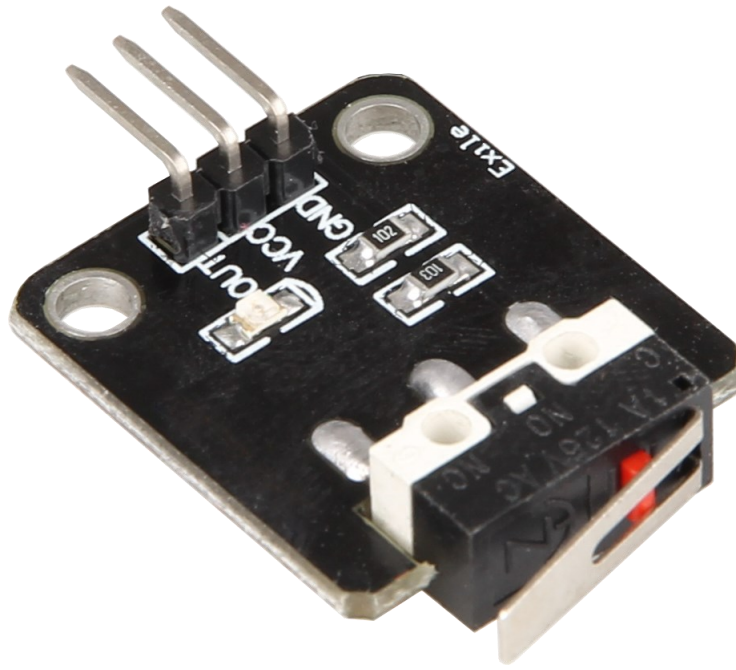


1. GENERAL INFORMATION

Dear customer,
thank you very much for choosing our product.
In the following, we will introduce you to what to observe while starting up and using this product.

Should you encounter any unexpected problems during use, please do not hesitate to contact us.

2. DEVICE OVERVIEW

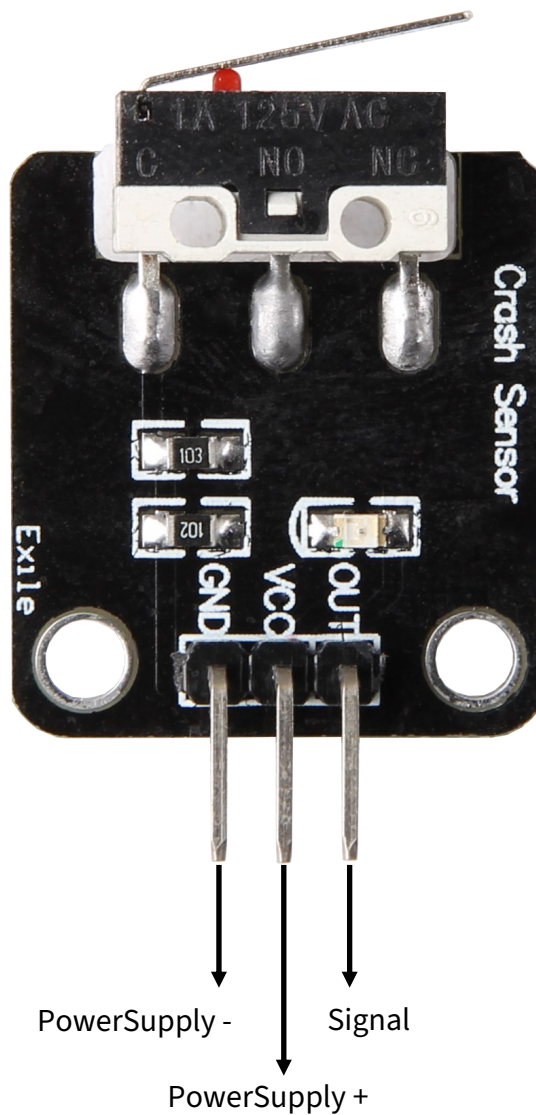


When the switch is not activated, a HIGH level is present at the signal pin. When the switch is activated, a LOW level is present at the signal pin and the LED on the board lights up red.

3. USE WITH ARDUINO

Wiring

Connect the sensor to your Arduino as shown in the diagram and table below.

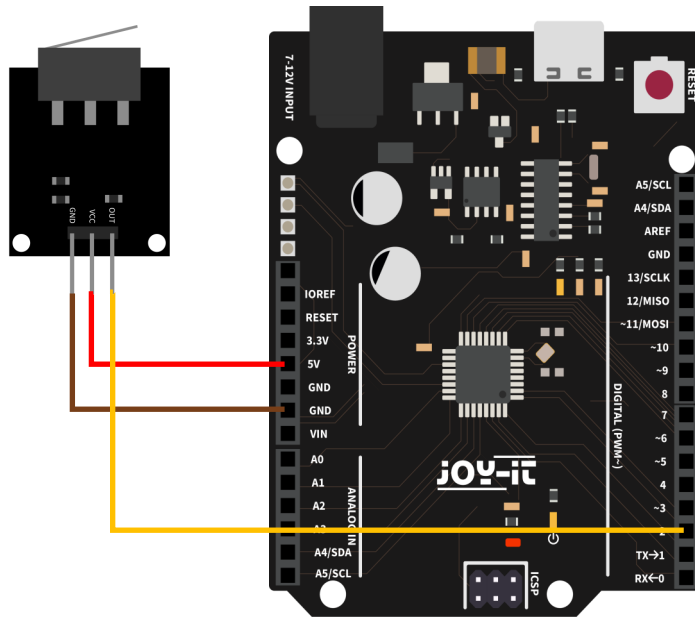

BUMP-Sensor	Arduino
GND	GND
VCC	5 V
OUT	2

Example Code

In this code example, the status of the sensor is read out every second and displayed in the serial monitor.

```
const int SWITCH_PIN = 2;
bool switchState = HIGH; //Variable the switch status

void setup() {
  // Initialize the switch pin as an input
  pinMode(SWITCH_PIN, INPUT);

  // Initialize serial communication at 9600 bps:
  Serial.begin(9600);
}

void loop() {
  // Read the state of the switch value:
  switchState = digitalRead(SWITCH_PIN);

  // Read the state of the switch
  if (switchState == LOW) {
    Serial.println("Switch is pressed!");
  } else {
    Serial.println("Switch is not pressed!");
  }

  // Wait for a short period before reading again
  delay(1000);
}
```


4. USE WITH RASPBERRY PI



This guide was written under Raspberry Pi OS Bookworm for the Raspberry Pi 4 and 5. It has not been checked with newer operating systems or hardware.

Wiring

Connect the sensor to your Raspberry Pi as shown in the diagram and table below.

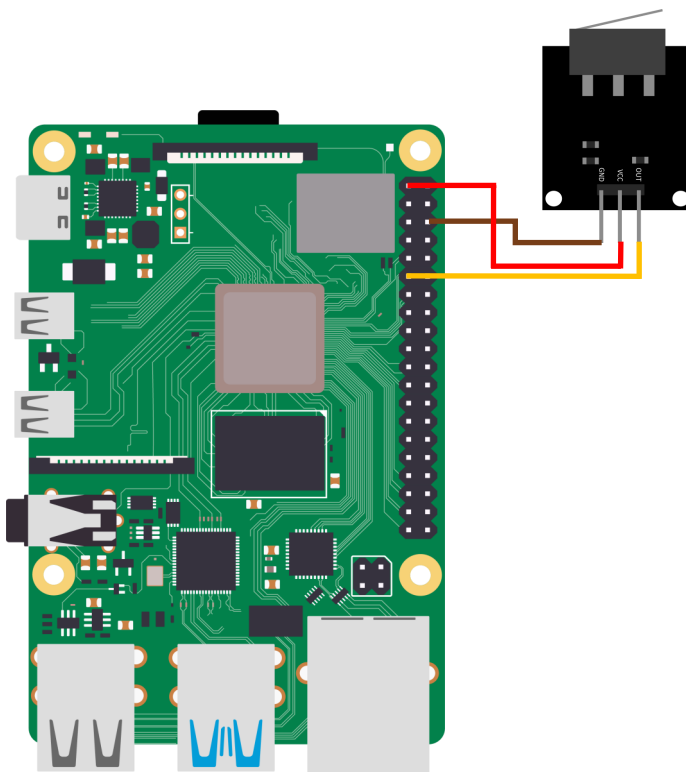

BUMP-Sensor	Raspberry Pi
GND	GND (Pin 6)
VCC	3V3 (Pin 1)
OUT	GPIO17 (Pin 11)

Example Code

In this code example, the status of the sensor is read out every second and displayed in the console.

```
from gpiozero import Button
from time import sleep

# Define the GPIO pin number
# GPIO 17 with pull-up resistor enabled
switch = Button(17, pull_up=True)

try:
    while True:
        # Read the state of the switch
        if switch.is_pressed:
            print("Switch is pressed!")
        else:
            print("Switch is not pressed!")

        # Wait for a short period before reading again
        sleep(1)

except KeyboardInterrupt:
    pass
```

5. ADDITIONAL INFORMATION

Our information and take-back obligations according to the Electrical and Electronic Equipment Act (ElektroG)



Symbol on electrical and electronic equipment:

This crossed-out dustbin means that electrical and electronic appliances do not belong in the household waste. You must return the old appliances to a collection point.

Before handing over waste batteries and accumulators that are not enclosed by waste equipment must be separated from it.

Return options:

As an end user, you can return your old device (which essentially fulfills the same function as the new device purchased from us) free of charge for disposal when you purchase a new device.

Small appliances with no external dimensions greater than 25 cm can be disposed of in normal household quantities independently of the purchase of a new appliance.

Possibility of return at our company location during opening hours:

SIMAC Electronics GmbH, Pascalstr. 8, D-47506 Neukirchen-Vluyn, Germany

Possibility of return in your area:

We will send you a parcel stamp with which you can return the device to us free of charge. Please contact us by email at Service@joy-it.net or by telephone.

Information on packaging:

If you do not have suitable packaging material or do not wish to use your own, please contact us and we will send you suitable packaging.

6. SUPPORT

If there are still any issues pending or problems arising after your purchase, we will support you by e-mail, telephone and with our ticket support system.

Email: service@joy-it.net

Ticket system: <https://support.joy-it.net>

Telephone: +49 (0)2845 9360-50 (Mon - Thur: 09:00 - 17:00 o'clock CET, Fri: 09:00 - 14:30 o'clock CET)

For further information please visit our website:

www.joy-it.net