


A026 Phono Pre-Amplifier

Now days most of audio amplifier and audio systems does not comes with Phone preamplifier. This kits is solution for this. Kit has been designed around op-amp which amplify low level moving cartridge signal into high level audio signal and this signal can feed to any standard audio amplifier for great music quality. Great kit for DIY turn table.

Supply dual 15 VDC @ 150mA
Berg connectors for supply audio output and signal input
Onboard dual supply indication

ANYKITS™

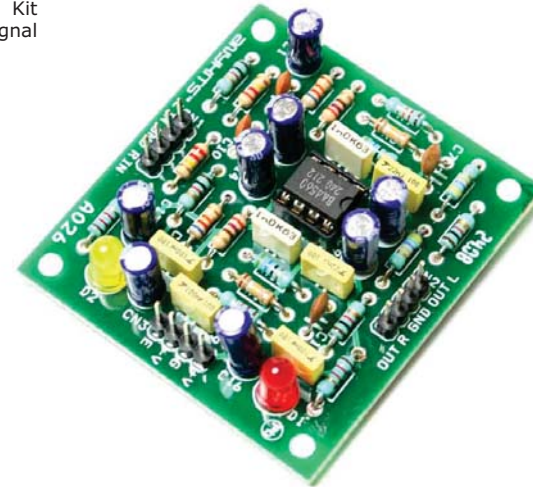


Turn Table



Phono Pre-Amp.

Audio Amp



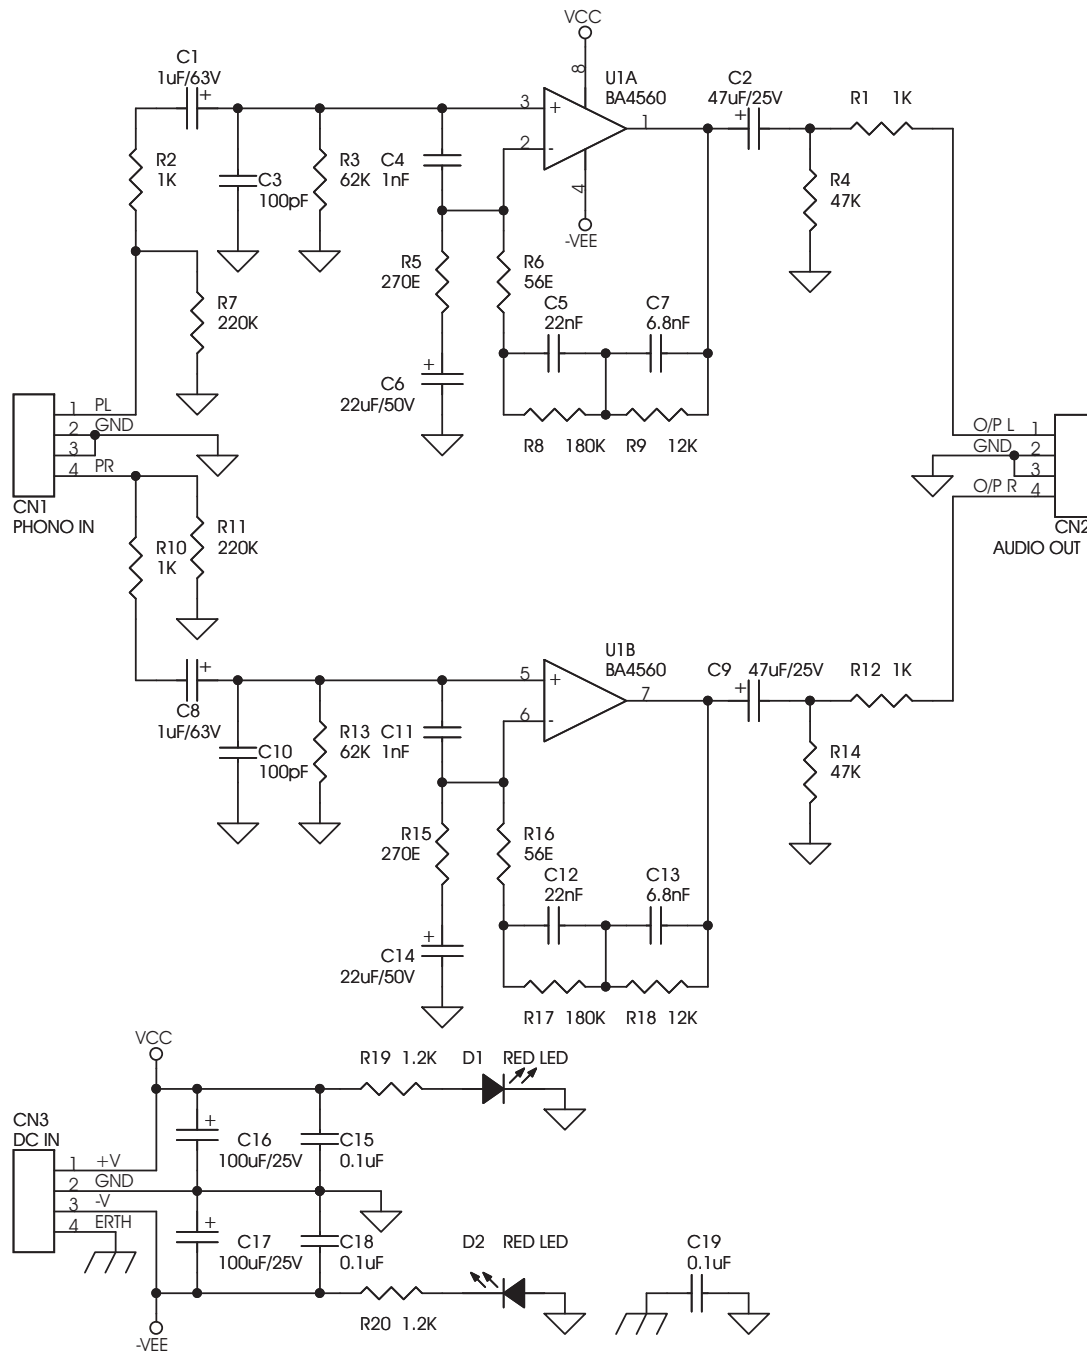

SR	QTY	REFERENCE	DESCRIPTION
1	1	CN1	4 PIN BERG CONNECTOR
2	1	CN2	4 PIN BERG CONNECTOR
3	1	CN3	4 PIN BERG CONNECTOR
4	2	C1,C8	1uF/63V
5	2	C2,C9	47uF/25V
6	2	C3,C10	100pF
7	2	C4,C11	1nF
8	2	C5,C12	22nF
9	2	C6,C14	22uF/50V OR 63V
10	2	C7,C13	6.8nF
11	3	C15,C18,C19	0.1uF
12	2	C16,C17	100uF/25V
13	2	D1,D2	RED LED
14	4	R1,R2,R10,R12	1K
15	2	R3,R13	62K
16	2	R4,R14	47K
17	2	R5,R15	270E
18	2	R6,R16	56E
19	2	R7,R11	220K
20	2	R8,R17	180K
21	2	R9,R18	12K
22	2	R19,R20	1.2K
23	1	U1	BA4560/RC4560/NJM4560
24	1	DIP Socket	8 PIN DIP SOCKET

