
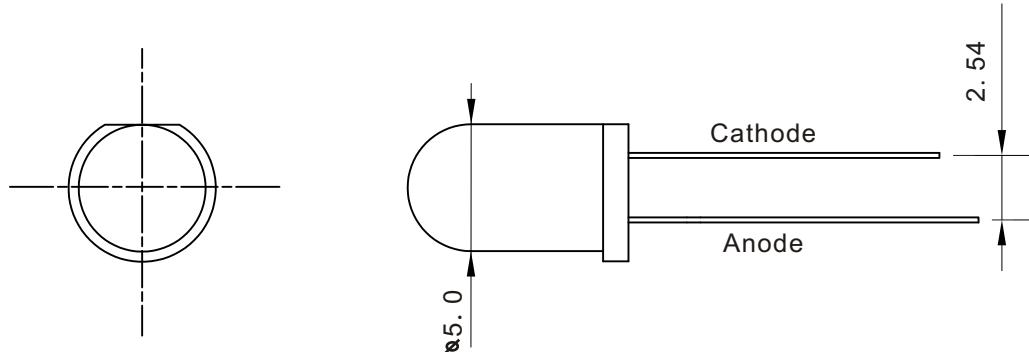


## KTL050IDI-U

## Features

- \* 5.0mm x 8.7mm round LED lamp
- \* Low power requirement
- \* I.C. Compatible
- \* Easy assembly
- \* RoHs compliant
- \* Wide viewing angle
- \* Bicolour version available

Part No.	Chip		Lens
	Ram Material	Emitted colour	
KTL050IDI-U	AllInGaP	Yellow	Diffused

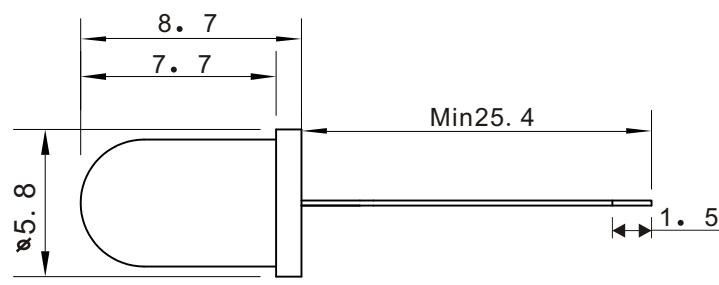

NOTES: 1. All dimensions are in millimeter(inches), tolerance is 0.25 unless otherwise noted.  
2. Specifications are subject to change without notice.

Absolute Maximum Rating: (TA=25°C)

Parameter	Symbol	Maximum Rating	Unit
Peak Forward Current	IFp	70	mA
Forward Current	IF	20	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	42	mW
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+85	°C
Electronstatic Discharge	ESD	500	V
Soldering Temperature		260°C for seconds	

Lead soldering Temperature (4mm from body) : 260°C for seconds

Optical-Electrical Characteristic: (TA=25°C)

Parameter	Symbol	Condition	Min	Type	Max	Unit
Forward Current	VF	IF=20mA	1. 9	—	2. 1	V
Reverse Current	IR	VR=5V		—	5	uA
Dominant Wavelength	λd	IF=20mA			590	nm
Peak Wavelength	λP	IF=20mA	585	587	590	nm
Luminous Intensity	Iv	IF=20mA	700	—	800	mcd
Viewing Angle	2θ1/2	IF=20mA	—	110	—	Deg

Fig. 1

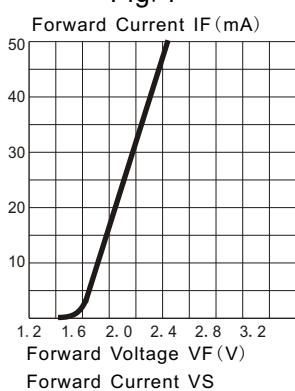
Forward Current VS  
Forward Voltage .

Fig. 2





Relative Luminous Intensity  
VS. Forward Current

Fig. 3

Forward Current IF (mA)  
Ambient °C  
Temperature Ta (°C)Fig. 4  
Yellow

Relative Intensity vs. Wavelength

Fig. 5

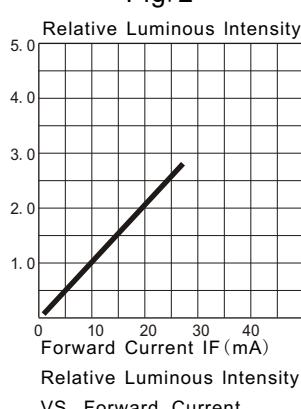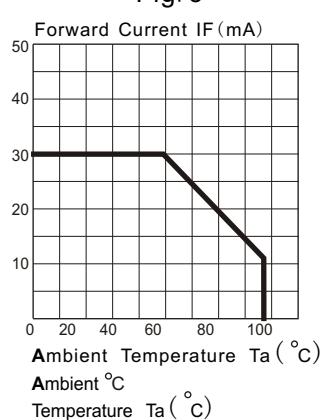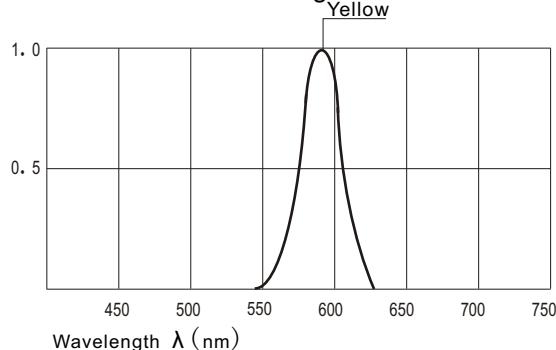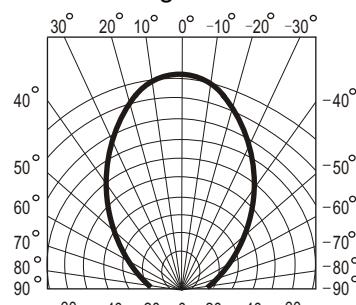

NOTES: 1. All dimensions are in millimeter(inches), tolerance is 0.25 unless otherwise noted.  
 2. Specifications are subject to change without notice.