
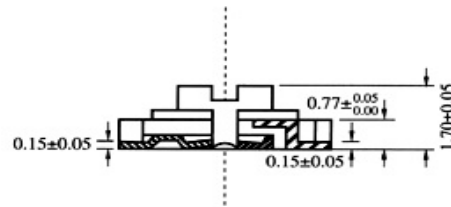


Features

- Miniature and Low profile capacitor
- Mountable by and automatic placer
- Re-flow soldering applicable
- Easy adjustment by using a conventional screw driver

Specifications

Operating Temperature Range	-25°C to +85°C
Rated Working Voltage	100VDC
Dielectric Withstanding Voltage	220VDC
Insulation Resistance	10 ⁴ Ωmin.at 100VDC
Rotation Torque	15-100 gf/cm

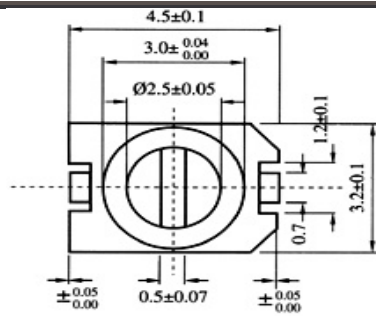

UNIT: mm

Part Number	Capacitance (pF)		Temperature Coefficient (ppm/°C)	Q(1MHz, Cmax) (min.)
	Min.(+0%)	Max.(+50%)(-0%)		
CVN303	1.7	3.0	NPO±300	500
CVN306	2.5	6.0	NPO±300	500
CVN310	3.5	10.0	NP750±300	500
CVN320	5.0	20.0	NP1200±500	300
CVN330	7.0	30.0	NP1200±500	300