File No.	432	SHEET 1 / 1

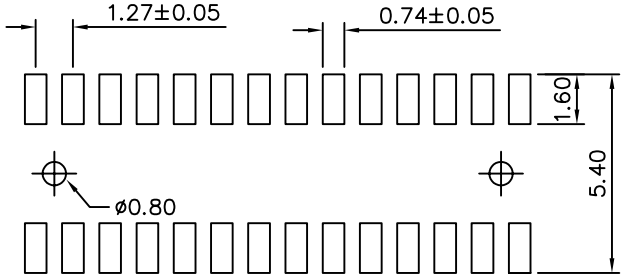

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1 Amp
Insulator Resistance: 1000 Megohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Withstanding: AC 500V/Minute
Operating Temperature: −40°C To +105°C
Contact: Phosphor Bronze, Gold Flash Over All
Insulator: Polyester, PA6T+30%GF, UL 94V−0

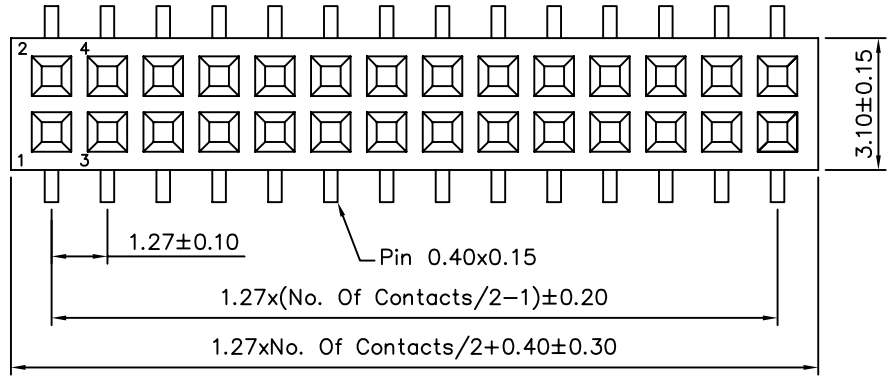

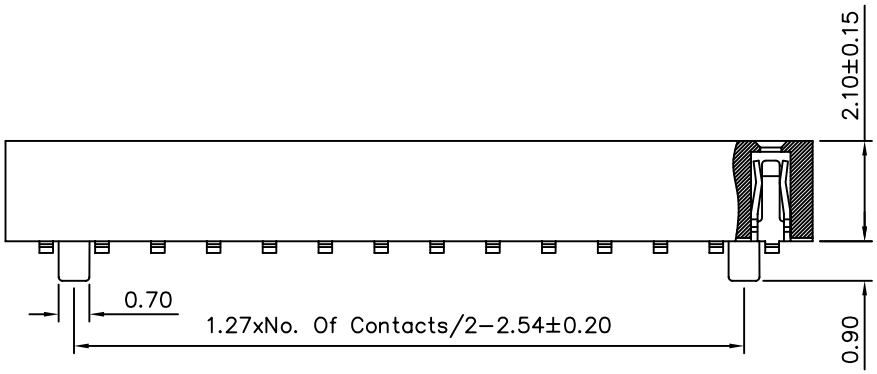

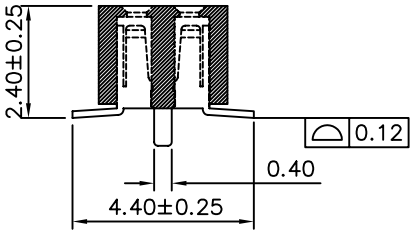

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
10747	CHECKED BY	BECKY	.X ±0.38
	DRAWING BY	HZF	.XX ±0.25
			.XXX ±0.12
SCALE NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	BECKY	04/13/2005