



## Features

- Available in E12 series
- Small design of only 9.8 mm maximum diameter
- RoHS compliant\*

## Applications

- Input/output of DC/DC converters
- Power supplies for:
  - Portable communication equipment
  - Camcorders
  - LCD TVs
  - CD players
  - Car radios

## SDR1006 Series - SMD Power Inductors

### Electrical Specifications

| Bourns Part No. | Inductance 1kHz |          | Q Ref. | Test Frequency (MHz) | SRF Min. (MHz) | RDC Max. ( $\Omega$ ) | I rms Max. (A) | I sat Typ. (A) |
|-----------------|-----------------|----------|--------|----------------------|----------------|-----------------------|----------------|----------------|
|                 | ( $\mu$ H)      | Tol. %   |        |                      |                |                       |                |                |
| SDR1006-1R5ML   | 1.5             | $\pm 20$ | 35     | 7.96                 | 105            | 0.018                 | 6.40           | 10.00          |
| SDR1006-2R2ML   | 2.2             | $\pm 20$ | 35     | 7.96                 | 68             | 0.021                 | 5.40           | 10.00          |
| SDR1006-3R3ML   | 3.3             | $\pm 20$ | 34     | 7.96                 | 55             | 0.024                 | 5.00           | 10.00          |
| SDR1006-3R9ML   | 3.9             | $\pm 20$ | 34     | 7.96                 | 48             | 0.027                 | 4.60           | 8.40           |
| SDR1006-4R7ML   | 4.7             | $\pm 20$ | 33     | 7.96                 | 40             | 0.036                 | 4.00           | 7.30           |
| SDR1006-5R6ML   | 5.6             | $\pm 20$ | 33     | 7.96                 | 35             | 0.040                 | 3.80           | 6.40           |
| SDR1006-6R8ML   | 6.8             | $\pm 20$ | 33     | 7.96                 | 32             | 0.044                 | 3.40           | 5.90           |
| SDR1006-8R2ML   | 8.2             | $\pm 20$ | 31     | 7.96                 | 24             | 0.048                 | 3.00           | 5.40           |
| SDR1006-100ML   | 10              | $\pm 20$ | 30     | 2.52                 | 21             | 0.060                 | 2.60           | 5.10           |
| SDR1006-120ML   | 12              | $\pm 20$ | 30     | 2.52                 | 20             | 0.070                 | 2.45           | 4.50           |
| SDR1006-150ML   | 15              | $\pm 20$ | 30     | 2.52                 | 16             | 0.080                 | 2.25           | 4.00           |
| SDR1006-180ML   | 18              | $\pm 20$ | 30     | 2.52                 | 15             | 0.090                 | 2.15           | 3.80           |
| SDR1006-220ML   | 22              | $\pm 20$ | 25     | 2.52                 | 13             | 0.10                  | 1.95           | 3.50           |
| SDR1006-270KL   | 27              | $\pm 10$ | 25     | 2.52                 | 11             | 0.11                  | 1.75           | 3.40           |
| SDR1006-330KL   | 33              | $\pm 10$ | 25     | 2.52                 | 10             | 0.12                  | 1.50           | 2.90           |
| SDR1006-390KL   | 39              | $\pm 10$ | 20     | 2.52                 | 9.0            | 0.14                  | 1.35           | 2.60           |
| SDR1006-470KL   | 47              | $\pm 10$ | 20     | 2.52                 | 8.0            | 0.17                  | 1.25           | 2.30           |
| SDR1006-560KL   | 56              | $\pm 10$ | 20     | 2.52                 | 7.5            | 0.19                  | 1.15           | 2.10           |
| SDR1006-680KL   | 68              | $\pm 10$ | 15     | 2.52                 | 7.0            | 0.22                  | 1.10           | 2.00           |
| SDR1006-820KL   | 82              | $\pm 10$ | 15     | 2.52                 | 6.0            | 0.25                  | 1.00           | 1.90           |
| SDR1006-101KL   | 100             | $\pm 10$ | 15     | 0.796                | 5.2            | 0.35                  | 0.97           | 1.70           |
| SDR1006-121KL   | 120             | $\pm 10$ | 15     | 0.796                | 5.0            | 0.40                  | 0.89           | 1.50           |
| SDR1006-151KL   | 150             | $\pm 10$ | 15     | 0.796                | 4.5            | 0.47                  | 0.78           | 1.40           |
| SDR1006-181KL   | 180             | $\pm 10$ | 12     | 0.796                | 4.0            | 0.63                  | 0.72           | 1.30           |
| SDR1006-221KL   | 220             | $\pm 10$ | 12     | 0.796                | 3.8            | 0.73                  | 0.66           | 1.10           |
| SDR1006-271KL   | 270             | $\pm 10$ | 12     | 0.796                | 3.5            | 0.97                  | 0.57           | 1.00           |
| SDR1006-331KL   | 330             | $\pm 10$ | 12     | 0.796                | 3.2            | 1.15                  | 0.52           | 0.85           |
| SDR1006-391KL   | 390             | $\pm 10$ | 12     | 0.796                | 3.0            | 1.30                  | 0.48           | 0.80           |
| SDR1006-471KL   | 470             | $\pm 10$ | 12     | 0.796                | 2.5            | 1.48                  | 0.42           | 0.80           |
| SDR1006-561KL   | 560             | $\pm 10$ | 12     | 0.796                | 2.3            | 1.90                  | 0.33           | 0.66           |
| SDR1006-681KL   | 680             | $\pm 10$ | 12     | 0.796                | 2.1            | 2.25                  | 0.28           | 0.65           |
| SDR1006-821KL   | 820             | $\pm 10$ | 10     | 0.796                | 2.0            | 2.55                  | 0.24           | 0.56           |
| SDR1006-102KL   | 1000            | $\pm 10$ | 30     | 0.252                | 1.9            | 3.10                  | 0.23           | 0.53           |
| SDR1006-122KL   | 1200            | $\pm 10$ | 31     | 0.252                | 1.8            | 4.20                  | 0.21           | 0.48           |
| SDR1006-152KL   | 1500            | $\pm 10$ | 31     | 0.252                | 1.7            | 5.00                  | 0.19           | 0.45           |
| SDR1006-182KL   | 1800            | $\pm 10$ | 31     | 0.252                | 1.6            | 6.80                  | 0.17           | 0.38           |
| SDR1006-222KL   | 2200            | $\pm 10$ | 31     | 0.252                | 1.5            | 7.60                  | 0.16           | 0.36           |
| SDR1006-272KL   | 2700            | $\pm 10$ | 32     | 0.252                | 1.4            | 11.60                 | 0.14           | 0.33           |
| SDR1006-332KL   | 3300            | $\pm 10$ | 32     | 0.252                | 1.3            | 13.50                 | 0.12           | 0.30           |
| SDR1006-392KL   | 3900            | $\pm 10$ | 32     | 0.252                | 1.2            | 14.80                 | 0.11           | 0.28           |
| SDR1006-472KL   | 4700            | $\pm 10$ | 32     | 0.252                | 0.8            | 18.00                 | 0.10           | 0.24           |


### General Specifications

Test Frequency ..... 1 KHz  
 Test Voltage ..... 1 V  
 Reflow Soldering ... 230 °C, 50 sec. max.  
 Operating Temperature .. -40 °C to +125 °C  
 (Temperature rise included)  
 Storage Temperature .. -40 °C to +125 °C  
 Resistance to Soldering Heat  
 ..... 260 °C for 5 sec.


### Materials

Core ..... Ferrite DR core  
 Wire ..... Enamelled copper wire  
 Terminal ..... Ag/Ni/Sn  
 Rated Current  
 ..... Ind. drop 10 % typ. at Isat  
 Temperature Rise  
 ..... 40 °C max. at rated I rms  
 Packaging ..... 800 pcs. per reel


### Product Dimensions

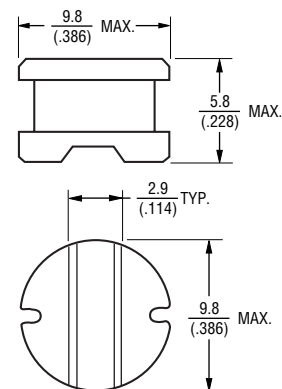

### Recommended Layout




### Typical Part Marking



# SDR1006 Series - SMD Power Inductors


**BOURNS®**

## Packaging Specifications

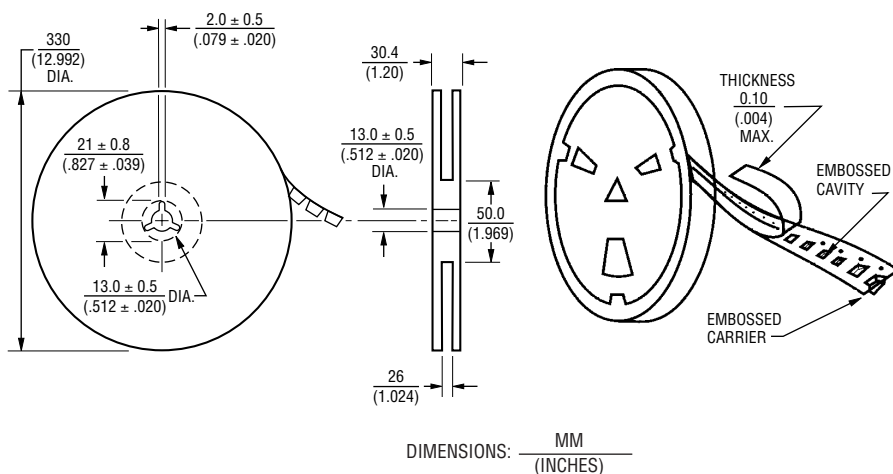


## Materials

Paper  
Plastics

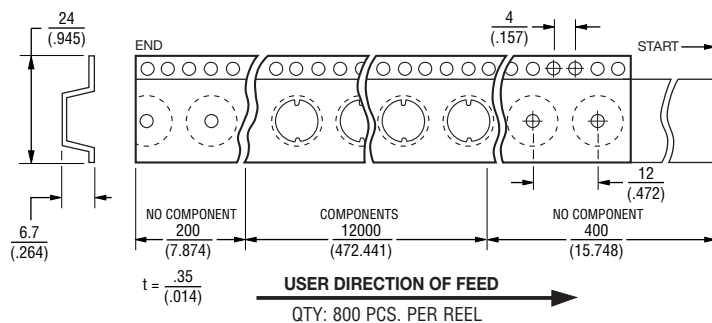

## Strength Of Cover Tape

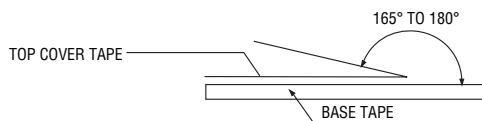

The force for tearing off cover tape is 10 to 130 grams in the arrow direction.