
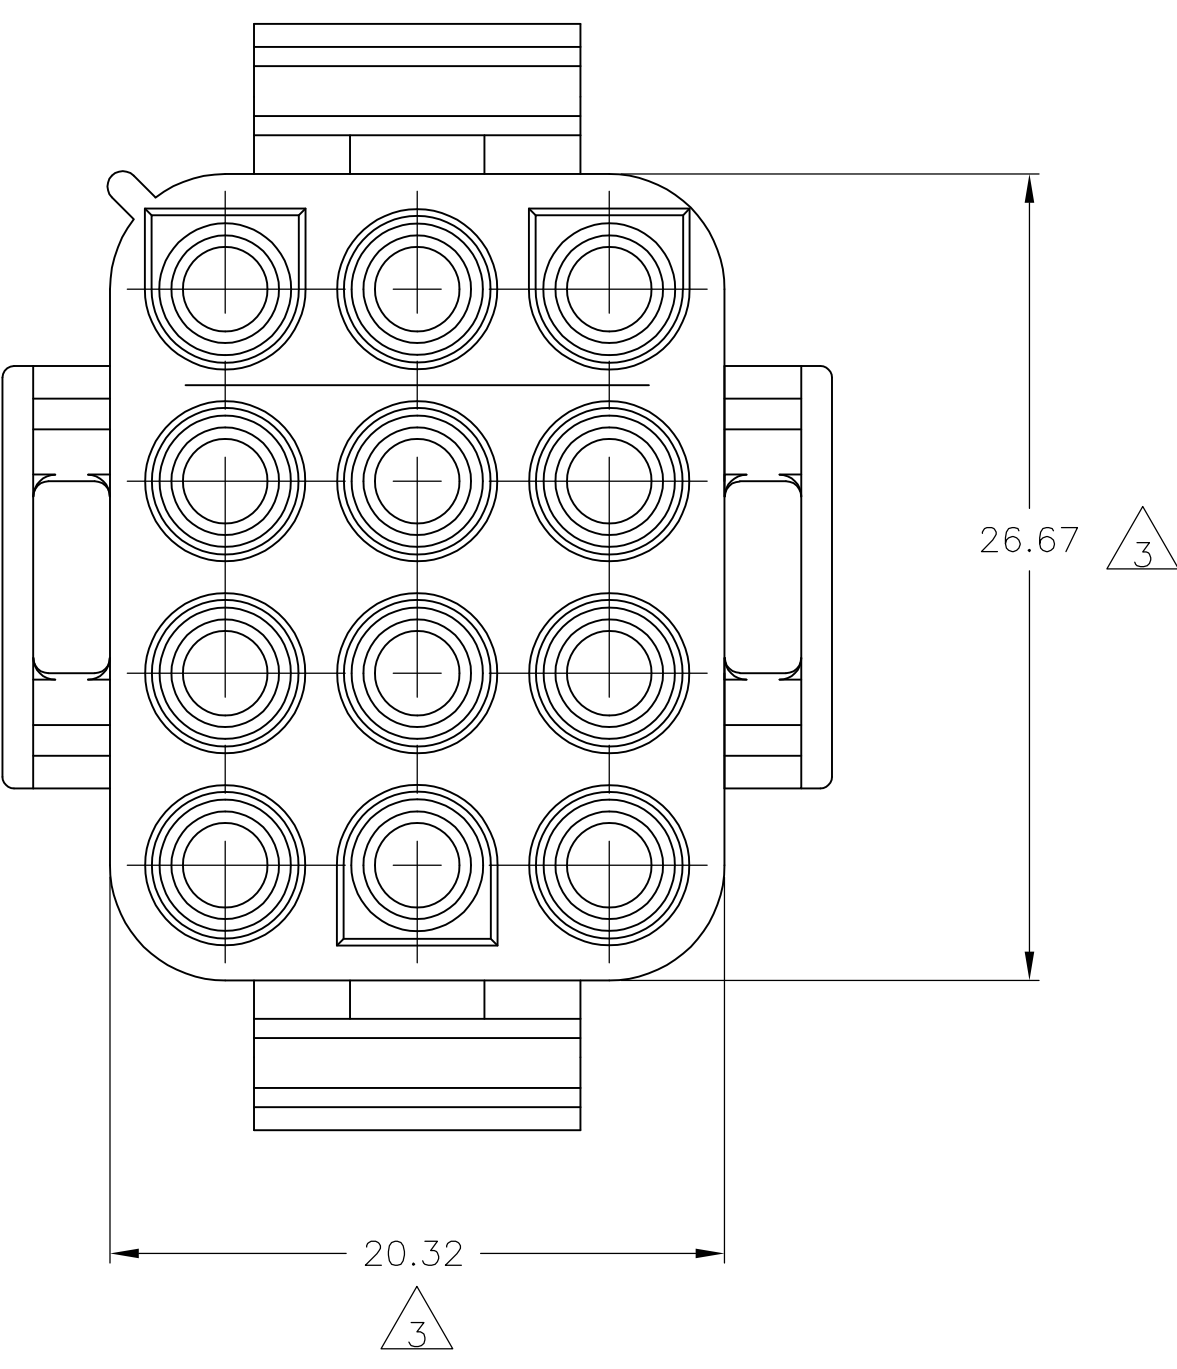


D


C

B



A

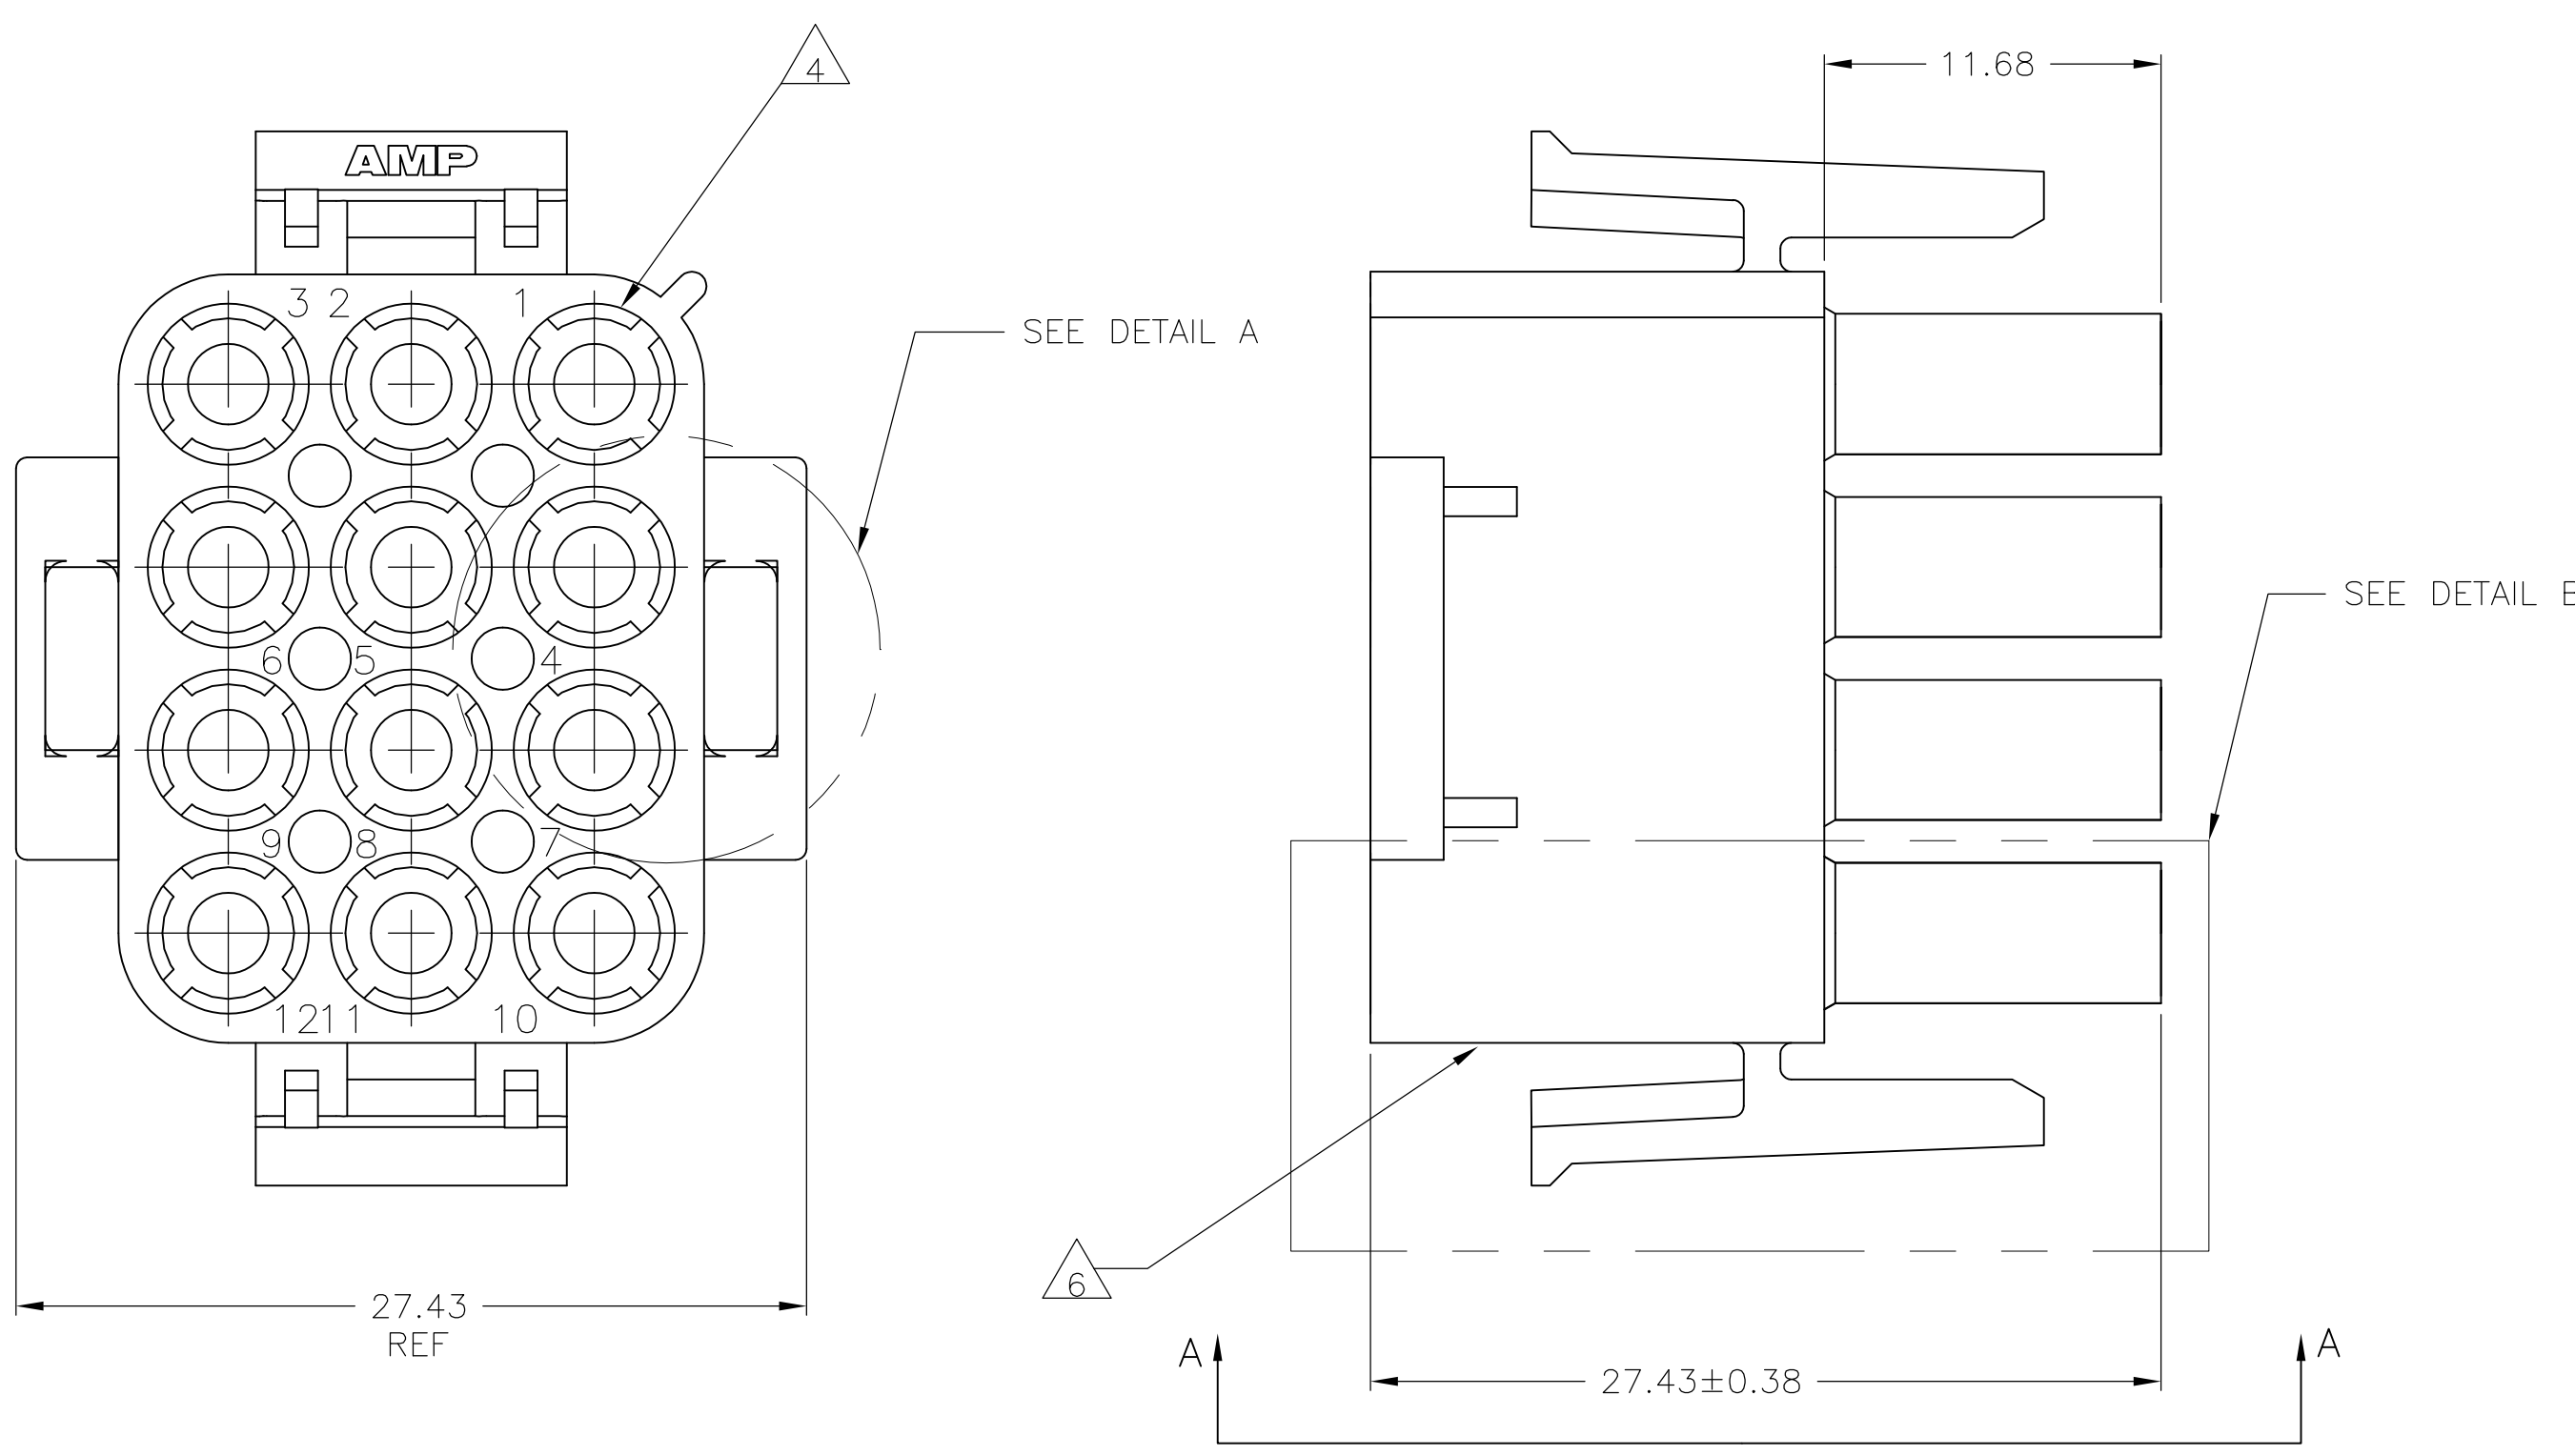


- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0] LBS. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5] LBS.
- △3 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- △5 NOT MANUFACTURED IN U.S.
- △6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE ON EACH SIDE OF HOUSING.

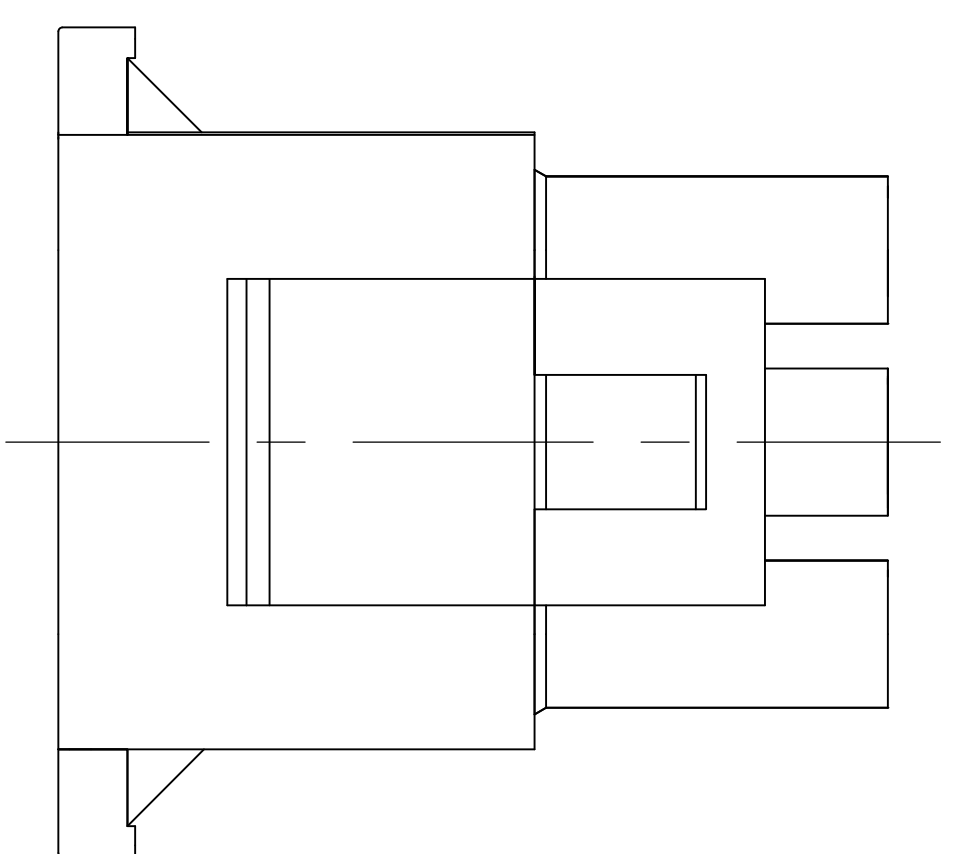


VIEW A—A
350735-4 ONLY

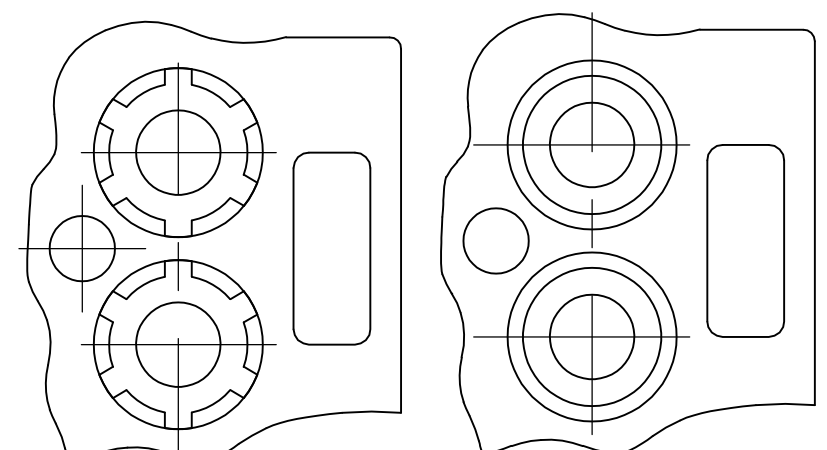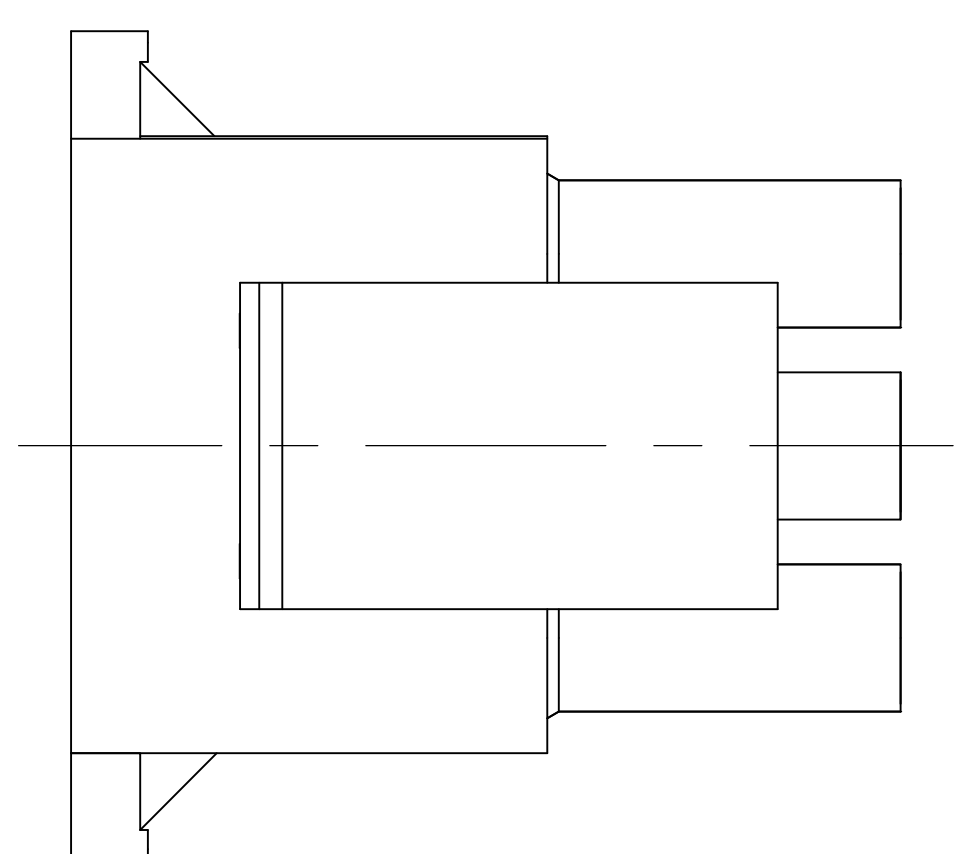


DETAIL A
OPTIONAL CONSTRUCTION

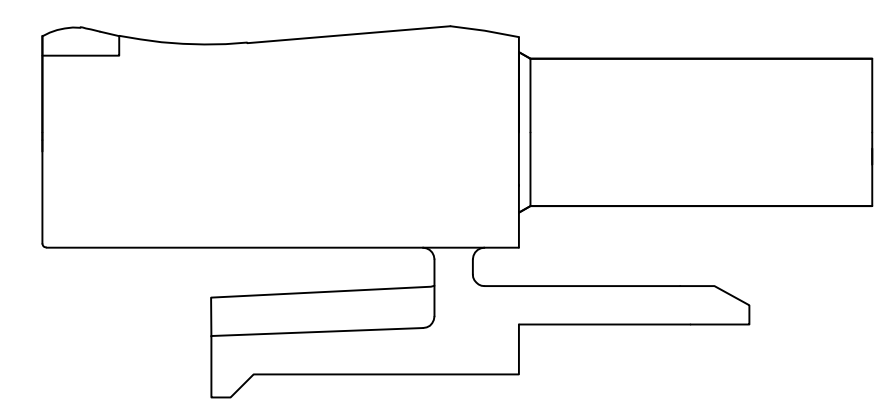

DETAIL B
350735-4 ONLY

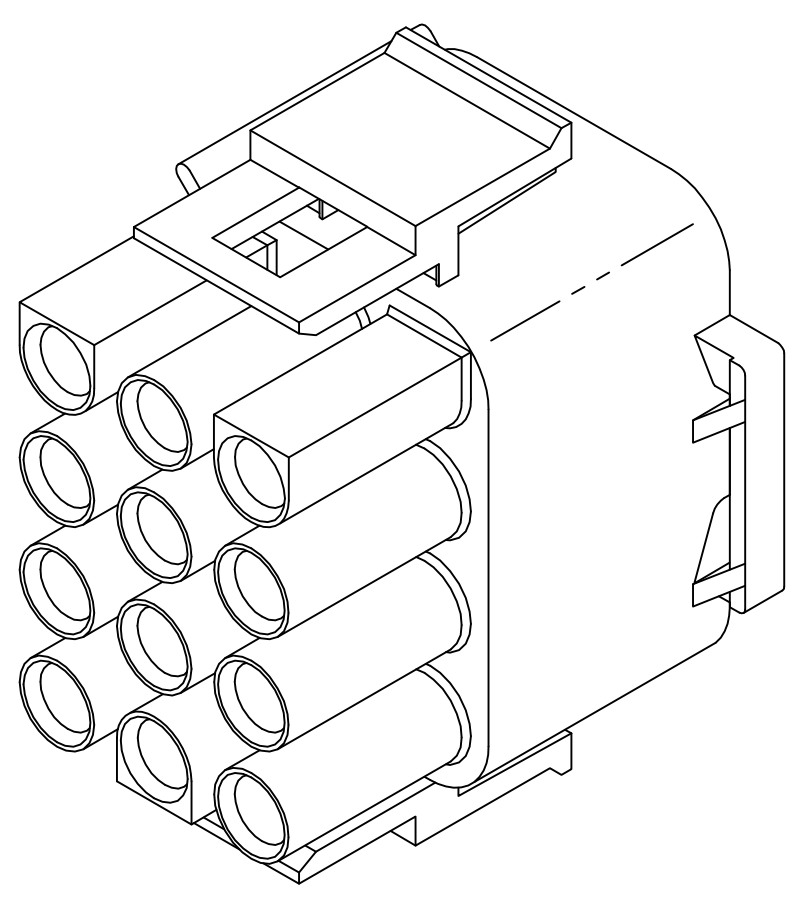

350735-4 3-DIMENSIONAL MODEL
NOT TO SCALE

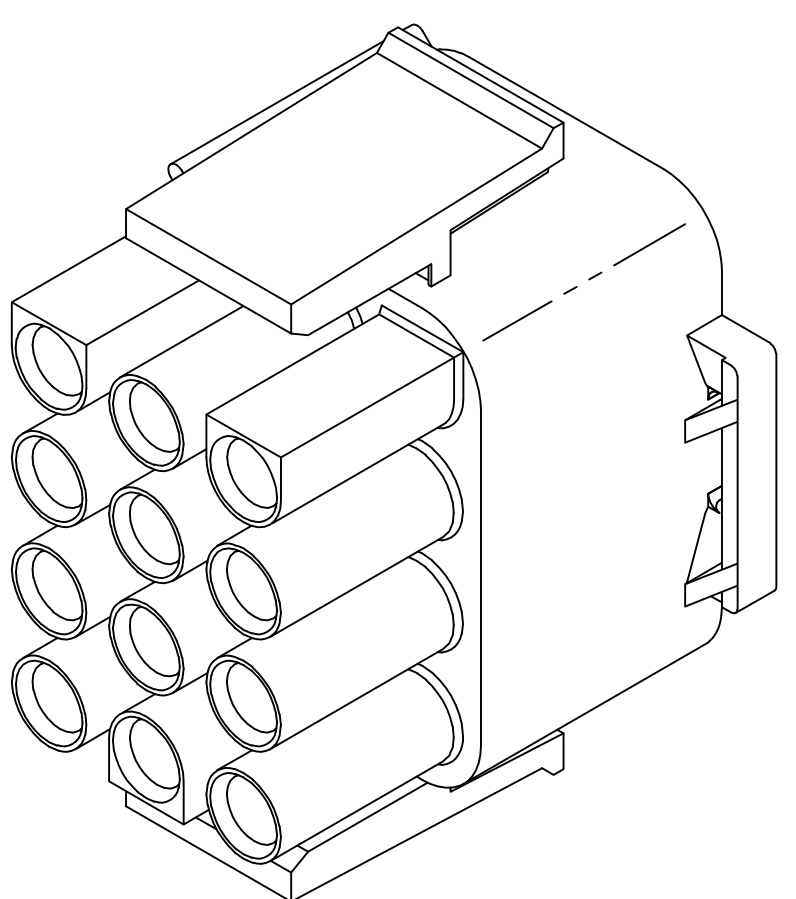

3-DIMENSIONAL MODEL
NOT TO SCALE

27.43	1.080
26.67	1.050
20.32	.800
11.68	.460
0.38	.015
0.13	.005
MM	IN

CONVERSION TABLE

4805 (3/11)

SUPERCEDED BY 1-350735-2

BLACK	1-350735-9
GRAY	1-350735-8
BLUE	1-350735-6
GREEN	1-350735-5
YELLOW	1-350735-4
ORANGE	1-350735-3
RED	1-350735-2
BROWN	1-350735-1
RED	350735-5
△5	350735-4
NATURAL	350735-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.13

3 PLC ± -

4 PLC ± -

ANGLES ± °30'

FINISH -

MATERIAL

NYLON,UL 94V-0

DWN

K. WHITAKER

23FEB06

CHK

S. RIDGILL

23FEB06

APVD

S. RIDGILL

23FEB06

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

NAME

PLUG, 12 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)

SIZE

A1

CAGE CODE

00779

DRAWING NO

350735

RESTRICTED TO

-

SCALE

4:1

SHEET

1

OF

1

REV

W1

TE Connectivity