

Socket, 3.5mm Jack


3 Pole

RoHS
Compliant



Specifications:

Dielectric Strength	: 500V AC for 1 minute
Max. Contact Resistance	: 50M Ω
Min. Insulation Resistance	: 100M Ω at 500V DC

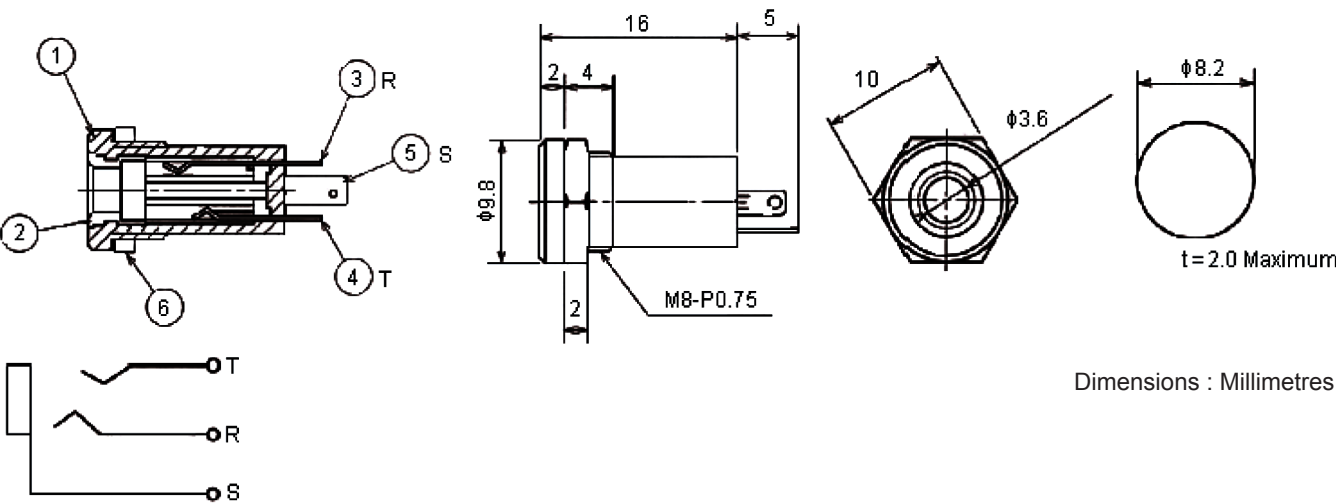

Dimensions : Millimetres

Specification Table

Item	Description	Material	Material Thickness	Finish
1	Housing	PA	-	-
2	Sleeve	BSBM	-	Au
3	Contact A	FAB-EH	t = 0.25	
4	Contact B	FAB-EH	t = 0.25	Ni
5	Contact C	BSR	t = 0.3	
6	Hex Nut	Steel	-	

The plastic resin of the main body(#1 Housing) of this part is PA66 nylon, and the Flammability level is UL94V-2.