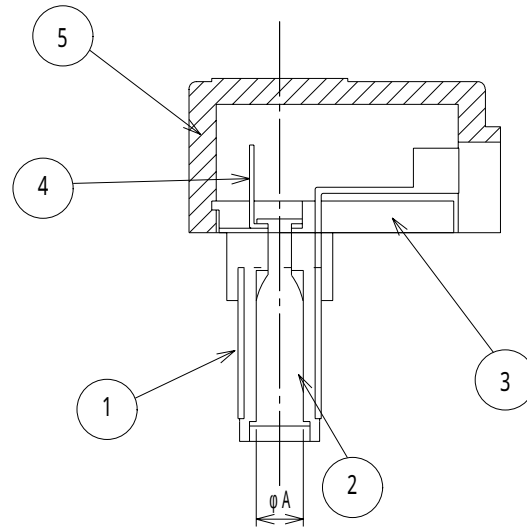
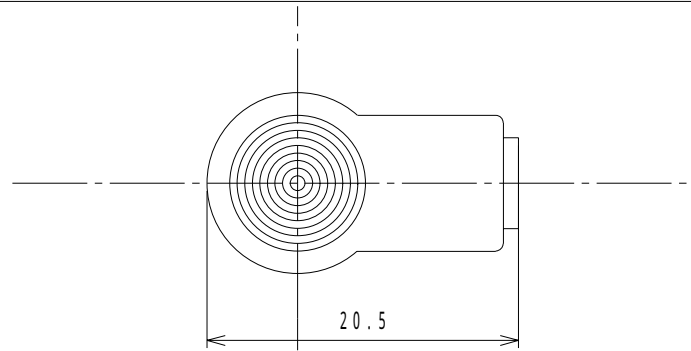
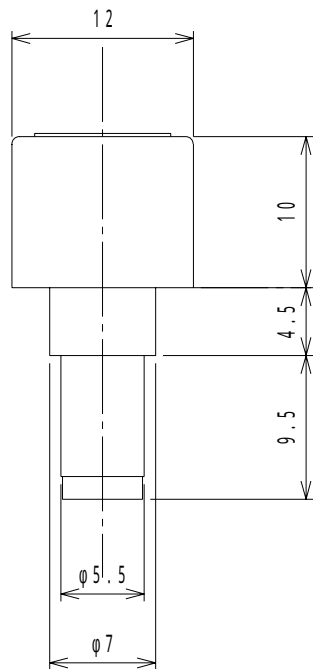


仕様 SPECIFICATION

1. 定格: MP136L=DC12V 0.5A
RATING:MP137L=DC12V 1A
2. 耐電圧: AC500V 1分間
WITHSTAND VOLTAGE:
AC500V 1MINUTE.
3. 絶縁抵抗: DC500Vにて100MΩ以上
INSULATION RESISTANCE:
DC500V/100MΩ MIN.
4. 接触抵抗: 30mΩ以下
CONTACT RESISTANCE:
30mΩ MAX.

A	
MP-136L	φ2.1
MP-137L	φ2.5

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
	2/1	3/5/30	M.K	N.I		

5	CAP	キャップ	PE	1		MODEL	QTY	PART NAME		
4	TERMINAL	センタ - 端子	BRASS 黄 銅	1	NI	型式		品名	No.MP-136L/137L	
3	INSULATOR	絶縁体	ABS	1		MATERIAL		DRAW.NO	MP136L	
2	CONTACT	中心電極	BRASS 黄 銅	1	NI	材質		図番		
1	SLEEVE	スリーブ	BRASS 黄 銅	1	NI	FINISH				
LET	PART NAME		MATERIAL	QTY	FINISH	NOTE	処理	EST MARUSHIN ELECTRIC MFG.CO.,LTD.		