




Model No.: TMB12A05

1	Rated Voltage (VDC)	5
2	Operating Voltage (VDC)	3-7
3	10cm Sound Output at 10cm (dB)	≥95
4	Operating Current(mA)	≤30
5	Resonant Frequency (Hz)	2400±300Hz
6	Operating Temperature (°C)	-40~+85
7	Storage Temperature (°C)	-30~+80
8	Weight (g)	1.7
9	Housing Material	Black PBT

Buzzer Soldering process	Soldering Parameter		
	Temp.(°C)	Time(Sec.)	Times
Reflow soldering	245±15	180°C 40-70 245°C 3Above 180°C time40-70	3
★ Wave soldering	255±15	4~6	2~3
★ Manual soldering	360±10	2~5	2~3
Remark: ★ Instance Soldering Process			

DIMENSIONS (UNIT: mm)


Tolerance:±0.5mm Except Specified

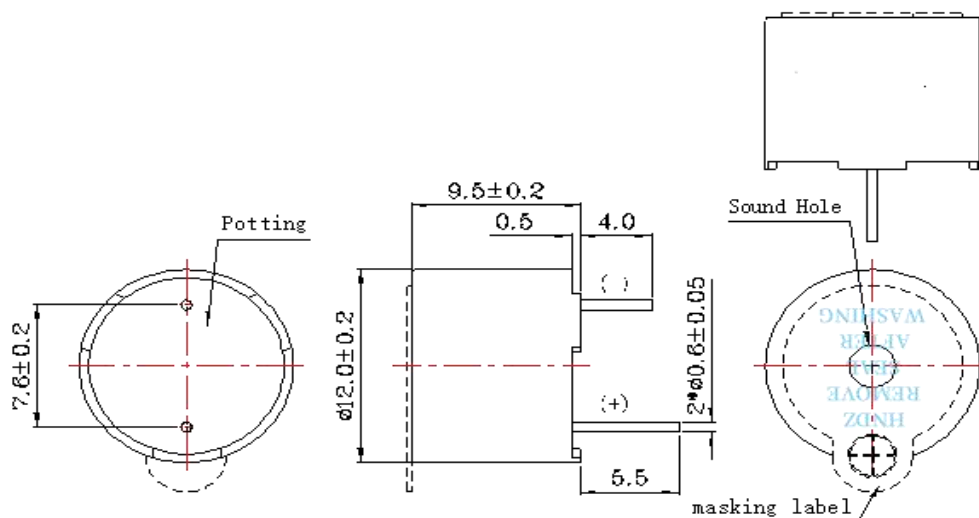



型号 Model No.: TMB12A05

测试方法 TEST METHOD

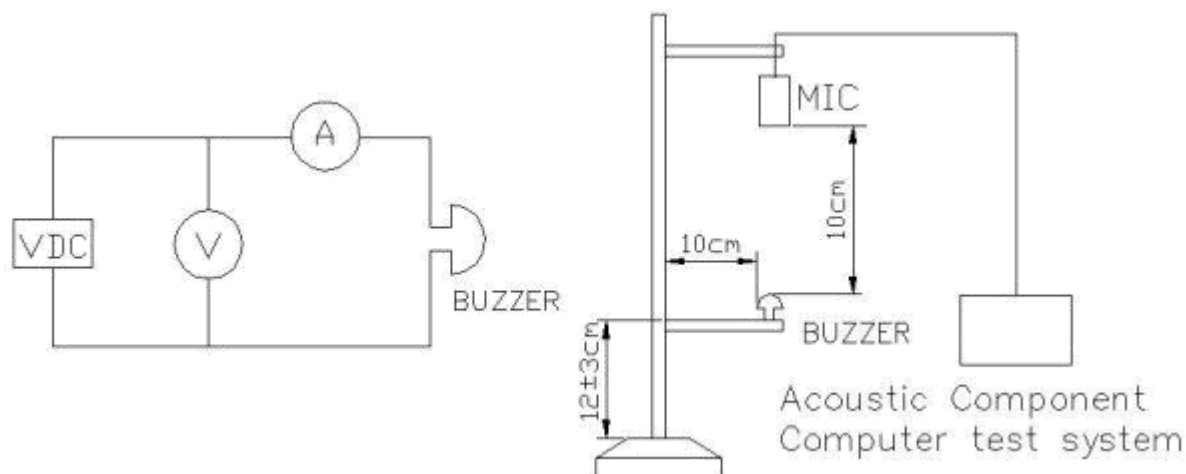

FREQUENCY RESPONSE

