


R13-507

Screw Type

CALUS

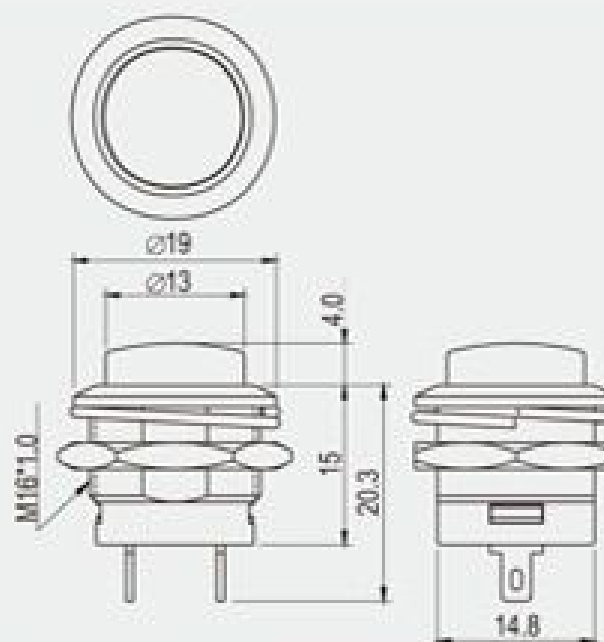

Rating

6A 125V AC
3A 250V AC

Contact resistance

50mΩ Max


Insulation resistance

DC 500V 100MΩ Min

Dielectric strength

AC 1000V 1 minute

Cut-out



6 mm max

FEATURES

- * MATERIAL: Frame is nylon glass fiber(UL flame: 94HB), Actuator is ABS. Terminals are silver plated brass. Base is PBT.
- * M type are metal frames, chromium plated brass
- * Mounted by nut.

R13-507

BODY

Plastic Body



M Metal Body



FUNCTION

A



* () =momentary

TERMINAL

0 5 0 SO