


BDFM (Mega/ANM) Bolt Down Fuse

Specifications:

- Ampere: 40A to 500A
- Voltage Rating: 32/48/72Vdc
- Interrupt Rating: 2,000A @ 32Vdc
- Operating Temp: -20C to 125C
- Material: Bakelite, Copper/Zinc-Alloy
- Color: Black

Dimensions:

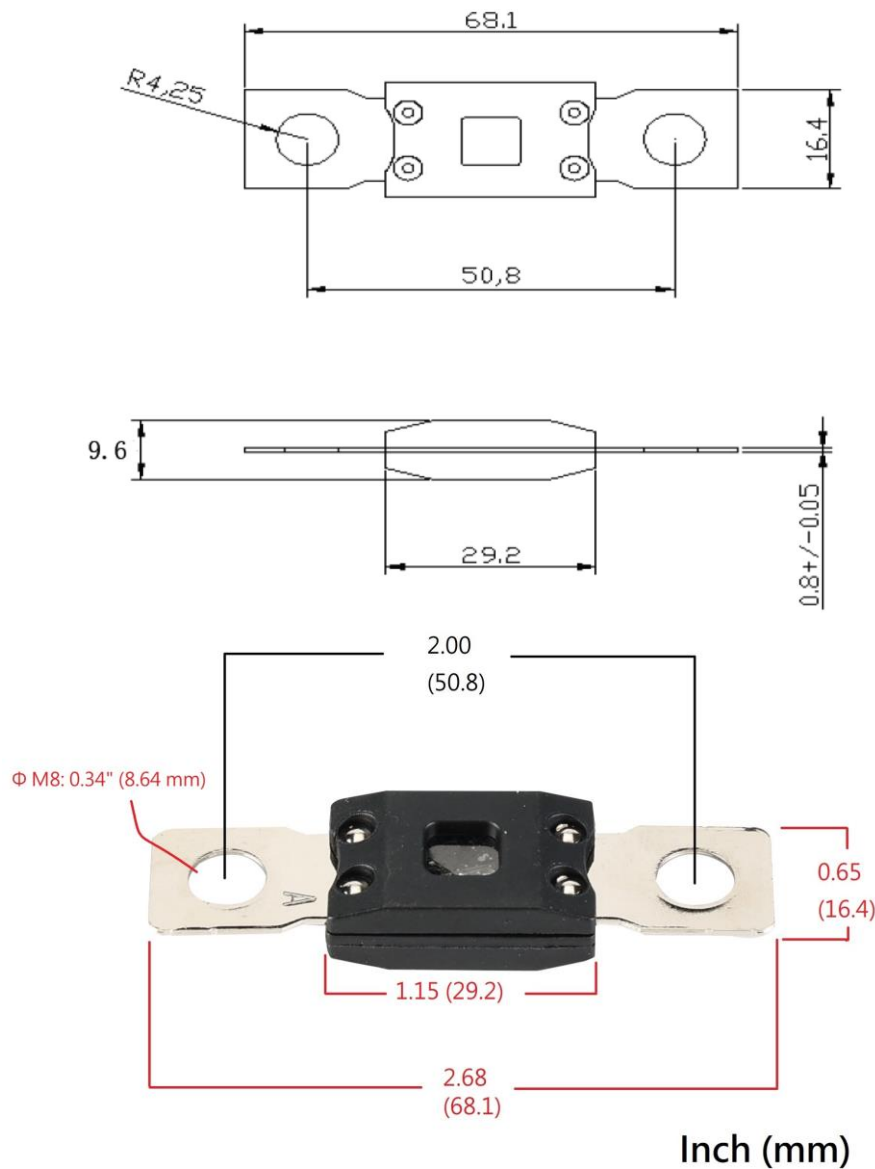

Time Current Characteristics:

% of Rating	Opening Time Min/Max (seconds)	
	40-250A	> 300A
75%	- / -	14,400 / -
100%	14,400 / -	- / -
135%	120 / 1800	- / -
200%	1 / 15	5-Jan
350%	0.3 / 5	0.5 / 5
600%	0.1 / 1	0.1 / 1

Product Information:

Part Number	Voltage Rating	Rated Current
BDFM-040	32V/48V/72V	40A
BDFM-050	32V/48V/72V	50A
BDFM-060	32V/48V/72V	60A
BDFM-070	32V/48V/72V	70A
BDFM-080	32V/48V/72V	80A
BDFM-100	32V/48V/72V	100A
BDFM-125	32V/48V/72V	125A
BDFM-150	32V/48V/72V	150A
BDFM-175	32V/48V/72V	175A
BDFM-200	32V/48V/72V	200A
BDFM-225	32V/48V/72V	225A
BDFM-250	32V/48V/72V	250A
BDFM-300	32V/48V/72V	300A
BDFM-350	32V/48V/72V	350A
BDFM-400	32V/48V/72V	400A
BDFM-450	32V/48V/72V	450A
BDFM-500	32V/48V/72V	500A