

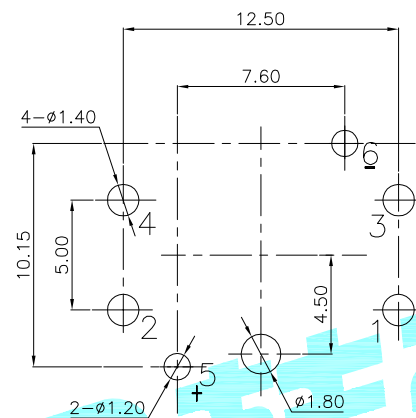
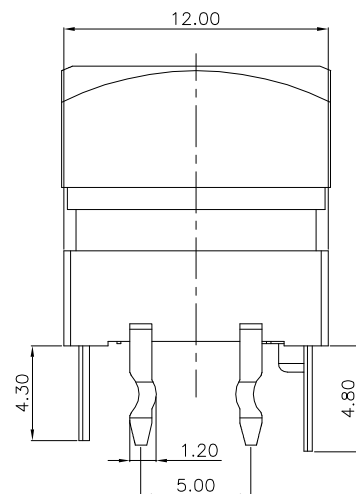
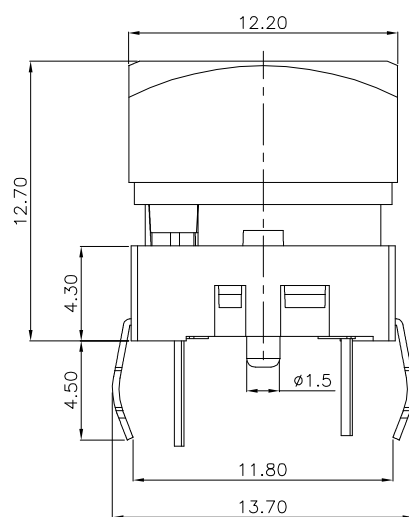

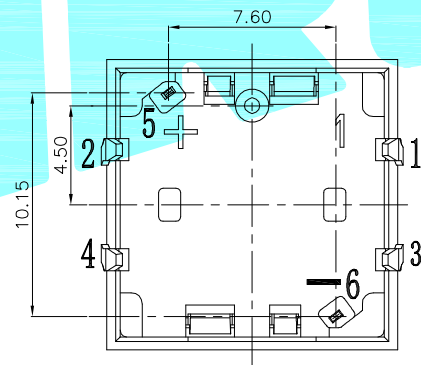


ROHS

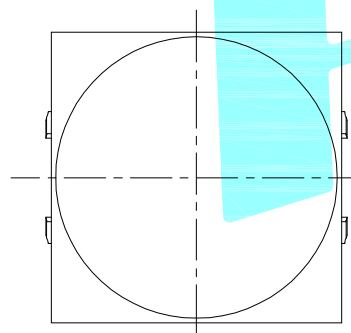

PCBLayout(pattern Side)

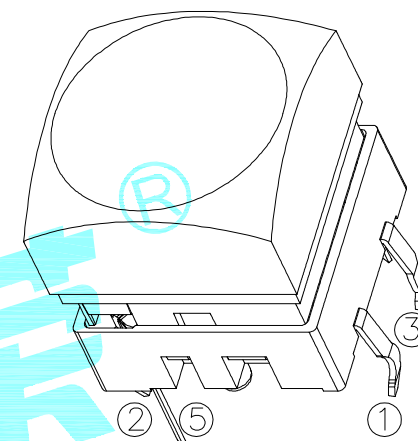

Circuit Diagram

Typical Specifications

- 1.Rating : DC 30V 0.3A
- 2.Operating Force : 250 ± 50 gf
- 3.Contact Resistance : 100mΩMAX
- 4.Life : 100,000 Cycles Min

②	Terminal	——	4	Phosphor bronze	Au Plating	——		
①	Housing	——	1	Nylon	Black	——		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE	HRO韩泰® ELECTRONICS CO.,LTD				
DRAWN	J.X.Zhang	2018/08/01						
CHECKED			TITLE: LED Tact Switch					
APPROVALS			PART NO. K6-6279D					
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
		10~30	±0.20					
		5~10	±0.15					
		~ 5	±0.10					
		±2'		DRAWING NO.	——	SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			