

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

3.Torque value: M2.5, 3.54Lb.in

4. Wire range: 28~12AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	4.0KV
Rate Voltage(V)	/	/	320V
Rate Current(A)	/	15A	/

2. Torque value: M2.5, 0.4Nm

3.wire range: 0.2~2.5mm²

NOTES2:

1.Housing: PA66 (UL94V-0)

2.Cover: PA66 (UL94V-0)

3.Cage: Brass (Ni Plated)

4.Conductor: Copper alloy (Sn Plated)

5.Screw: Steel (M2.5,Zn Plated)

NOTES3:

1.Pitch: 5.08mm Poles: 02-24P

2.Stripping length: 7-8mm

3.Operating Temperature: -40℃~+105℃

4.RoHS Compliance

How to order

MX2EDGRK - 5.08 - XXP - XXXX - XX - X - X

产品型号 间距 颜色 极数 0.1带剥颜色 0.1Y一字螺丝 A-Z其他定制

灰色:GY 棕色:OE 02-99:


蓝色:BU 红色:RD 定制颜色

黑色:BK 透明色:TT


绿色:GN 黄色:YW

白色:WE


Cu铜方块 1:5十字螺丝 2:P5平头十字螺丝 Fe铁方块

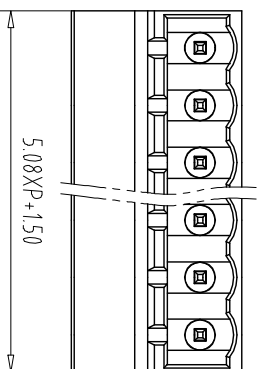


15.10



3.29

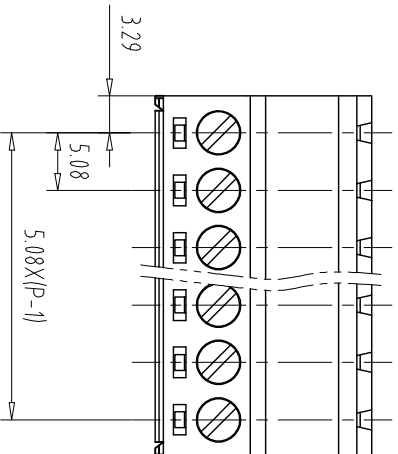

9.40



19.20

Pitch Range In mm	Nominal Dimension Range In mm	—	—	—
-------------------	-------------------------------	---	---	---

Over 6 TO	Over 10 TO	Over 10 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.11.09	UNITS	MM
CHK		DATE		SCALE	1:1
APP.		DATE		NAME	MX2EDGRK-5.08-XXP
				DWGNO.	