


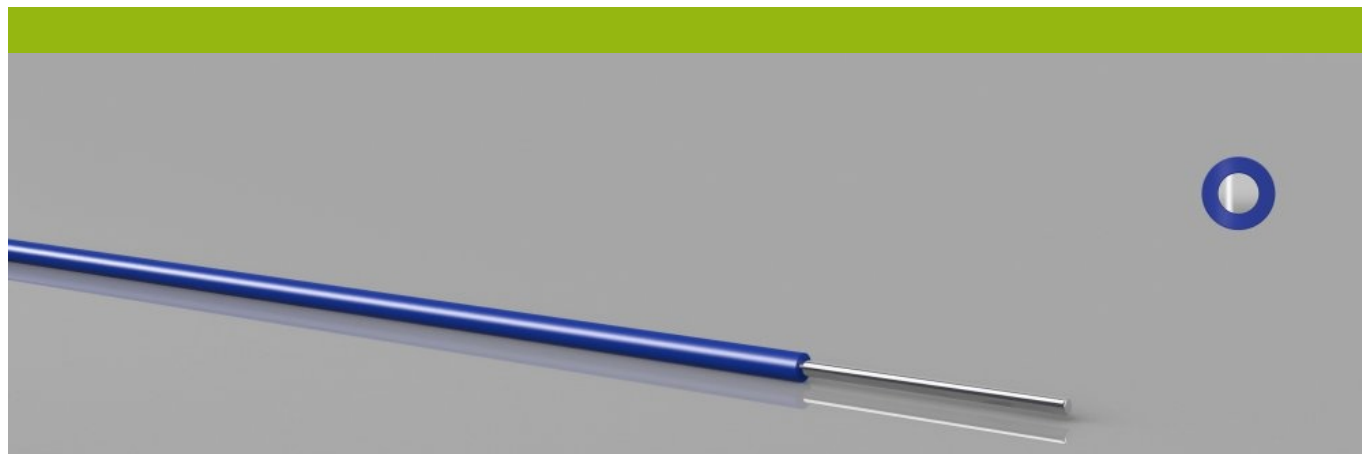

✓ installation ✓ RoHS ✓ REACH ✓ CE

Yv 0,30 mm

Hook-up wire, PVC
Order-No. 0701030

Application / Description

Communication technology, telecommunication installations.

Variant data

O.D.	approx. 0,70 mm
weight	1,0 kg/km
Cu-weight	0,8 kg/km
skinning tool	40026

Construction / data

Conductor	tinned copper wire
Structure of conductor	1x0,3 mm
Conductor-Ø	0,30 mm
Core insulation	PVC acc. to VDE 0207

Technical characteristics

Temperature range	static: -30 °C to +70 °C dynamic: -5 °C to +70 °C
Bending radius static	> 10 x O.D.
Bending radius dynamic	> 15 x O.D.
Operating voltage	350 V
Testing voltage	800 V
Insulation resistance	> 20 MΩm x km at + 20°C

Packaging

Rings at 100m
Lower and upper lengths according to availability. Special packaging on request.

Colours

Standard colours available from stock, further colours as well as two-coloured versions are available on request.



Technische Änderungen und Irrtümer vorbehalten. Die Eignung für einen konkreten Verwendungszweck muss vom Kunden geprüft werden. Achtung: Gefahr eines elektrischen Schlages, Produkt darf nur von Fachpersonal verarbeitet werden!

Technical changes and errors reserved. The suitability for a specific purpose must be checked by the customer. Warning: Risk of electric shock, the product may only be handled by qualified personnel

Mühlweg 6, 85095 Denkendorf

Tel.: 08466 - 9404-0

E-Mail: info@kabeltronik.de

