
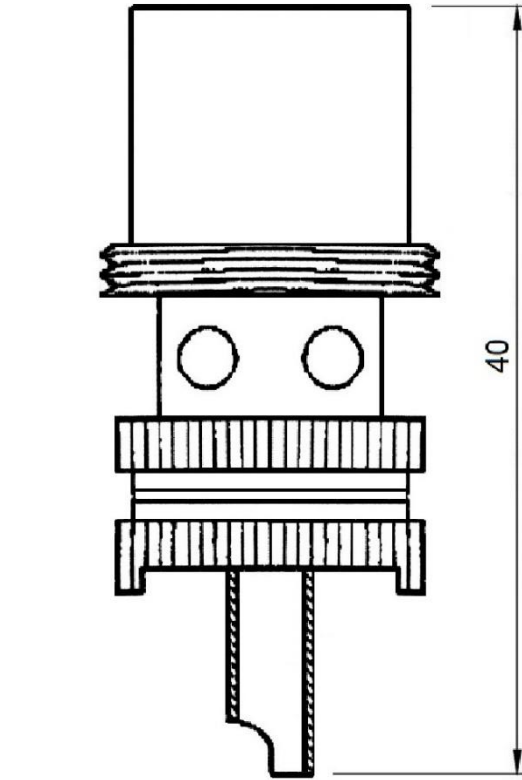


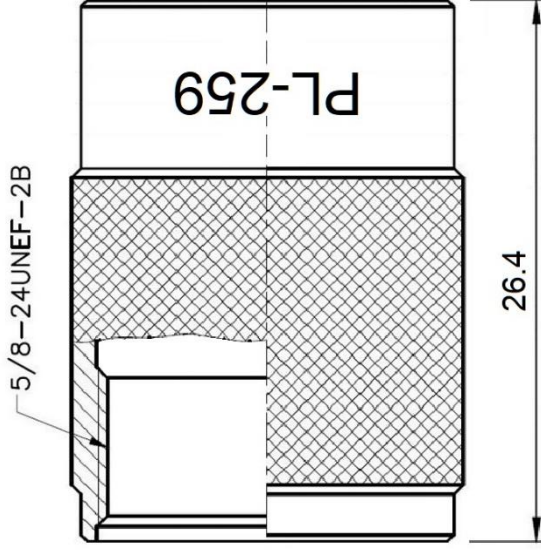

SPECIFICATIONS

VOLTAGE RATING: 500 VOLTS RMS
IMPEDANCE: NON CONSTANT
FREQUENCY RANGE: 0-300

FIT:

For all 0.390 to 0.400 OD Coax Types Including RG-8, RG-213, Belden 9913, LMR-400

w/ 7508-S Reducer

For all 0.240 OD Coax Types Including RG-8X, mini 8, RG-59, Belden 9258, LMR-240

w/ 507-S Reducer

For all 0.195 OD Coax Types Including RG-58, RG-142, RG-223, RG-400, LMR-195

w/ 7506-S Reducer

For all 0.100 OD Coax Types Including RG-174, RG-178, RG-188, RG-196, Belden 8216, LMR-100

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA, 30060
Phone: (770) 973-6251 | Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: PL-259 UHF male Solder On,
for LMR-400, RG-213, RG-8

DRAWING NO: 7500-UHF

FILE NO :

NO.	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED TOLERANCES		UNIT: mm	SCALE: .	PART NO	DATE
				0.5-5	±0.2			APPROVED	DATE
				5-30	±0.4			CHECKED	DATE
				30-120	±0.6			DRAWN	DATE
	PIN	BRASS	SILVER	120-315	±1				
	SHELL	BRASS	SILVER	315-1000	±1.6				
	DIELECTRIC	TEFLON	WHITE	1000-2000	±2.4				
	BODY	BRASS	SILVER						
		MATERIAL	FINISH						