



**Model No.: HMB1275-03B**


|   |                                |            |
|---|--------------------------------|------------|
| 1 | Rated Voltage (VDC)            | 3          |
| 2 | Operating Voltage (VDC)        | 2-5        |
| 3 | 10cm Sound Output at 10cm (dB) | ≥85        |
| 4 | Operating Current (mA)         | ≤30        |
| 5 | Resonant Frequency (Hz)        | 2700±300Hz |
| 6 | Operating Temperature (°C)     | -20~+70    |
| 7 | Storage Temperature (°C)       | -30~+80    |
| 8 | Weight (g)                     | 1.7        |
| 9 | Housing Material               | Black PBT  |

| Buzzer Soldering process | Soldering Parameter |                                              |       |
|--------------------------|---------------------|----------------------------------------------|-------|
|                          | Temp.(°C)           | Time(Sec.)                                   | Times |
| 回流焊Reflow soldering      | 245±15              | 180°C 40~70 245°C 3Above<br>180°C time 40~70 | 3     |
| ★ Wave soldering         | 255±15              | 4~6                                          | 2~3   |
| ★ Manual soldering       | 360±10              | 2~5                                          | 2~3   |

Remark: ★ Instance Soldering Process

**DIMENSIONS (UNIT: mm)**


±0.5mm Tolerance: ±0.5mm Except Specified

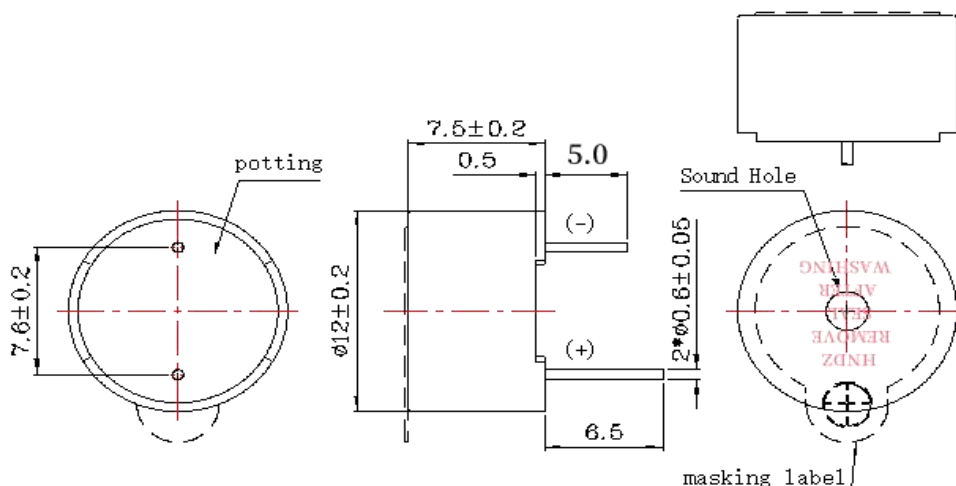



Model No.: HMB1275-03B

## TEST METHOD

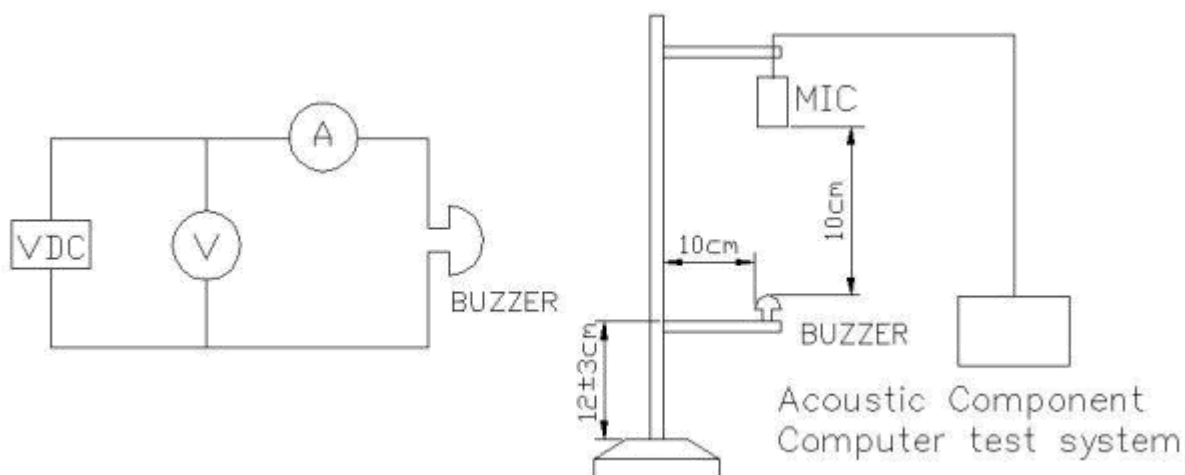

## FREQUENCY RESPONSE

