


NO	DESCRIPTION	DATE
△	BACKGROUND FORMAT UPDATED	01.22.03'
△	34.8±0.5 → 33.5±0.5	08.05.05'
△	BACKGROUND FORMAT UPDATED	01.08.09'
△	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	11.27.12'
△	ADD VSWR	03.19.14'

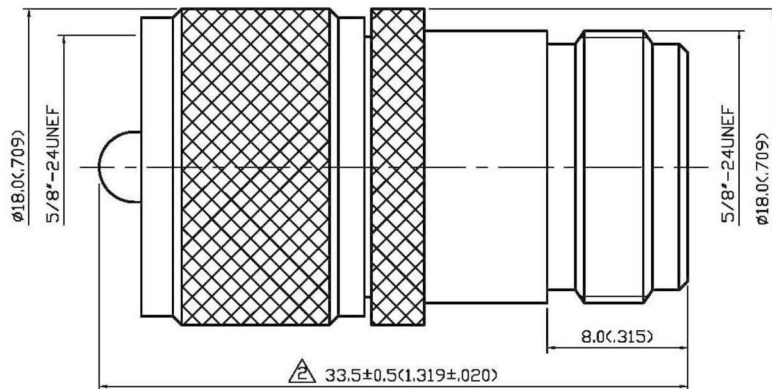

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-300 MHz  
 1.2 NOMINAL IMPEDANCE: 50 OHMS  
 1.3 VOLTAGE RATING: 500 VOLTS MAX. △  
 1.4 VSWR: 1.3 MAX. △

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604  
 2.2 CENTER CONTACT: BRASS PER JIS-C3604

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -40° C TO +60° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
6	INSULATION	POM	1	NONE
5	BODY	BRASS	1	NICKEL 100μ" MIN.
4	CENTER CONTACT	BRASS	1	GOLD
3	WASHER	BRASS	1	NONE
2	INSULATION	POM	1	NONE
1	SHELL	BRASS	1	NICKEL 100μ" MIN.

APPROVED

by

DATE:

DESCRIPTION		STRAIGHT UHF PLUG-N JACK ADAPTER	
製圖	DRAWN Yoko	TOLERANCE	品名 17-18 D.G.N
檢圖	CHECK Arc	單位	TITLE \ROHS COMPLIANT (50μ)
認定	APPROVAL Angela	比例	SCALE 4:1
		DWG.NO.	17-0077
		DATE	02.04.93
		版次	A-5
		REV.	